



Client _____ Quantity _____
Project _____ Position _____

FUN 700

Model: F70/40FTE/SL/P

Cod: MP01372123030

Technical data


| | |
|-------------------------------------|----------------------|
| Modularity: | On cabinet with door |
| Dimensions (mm): | 400x700x850 |
| Total electric power (kW): | 4,5 |
| Cooking zone dimensions 1 (LxD mm): | 396x520 |
| Electric power (V): | 380-415 |
| Ampere (A): | 7 |
| Phases: | 3N |
| Cable section (mmq): | 5G1,5 |
| Frequency (Hz): | 50-60 |
| Net volume (m3): | 0,238 |
| Packing dimensions (mm): | 477x776x1147 |
| Gross weight (kg): | 66 |
| Gross volume (m3): | 0,425 |

Features

| | |
|--------------------|--|
| Working top: | Made of AISI 304 stainless steel with a thickness of 10/10 mm |
| Material of plate: | Satin chrome |
| Plate finish: | Smooth |
| Knobs: | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |
| Handles: | Brushed aluminum finish |
| Plate: | Satin chrome plate |

Gas griddle with polished chromed smooth plate Top in AISI 304 stainless steel thickness 8/10; covering in AISI 430 stainless steel 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material. (aluminised sheet metal). Cooking hotplate in chromed steel with high thermal conductivity for even temperature distribution. Equipped with two independent cooking zones. Provided with front groove, extractable drawer for grease collection and splash guard on three sides. Equipped with steel burner and pilot burner with piezoelectric ignition - Gas supplied by means of thermostatic safety valve with thermocouple and pilot burners for automatic burner ignition. Burners 2x 5.7 kW. Total power 11.4 kW Plate dimensions 695x520 mm.

Technical draw

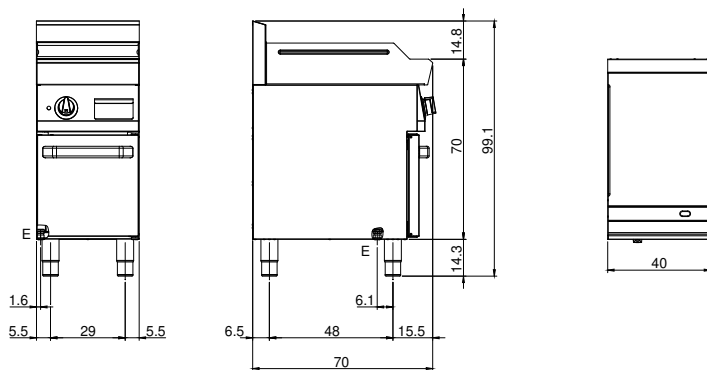

E: Electric power