

Client _____ Quantity _____
Project _____ Position _____



ROC 1100

Model: R110/60INDC/A

Cod: MP01135125121

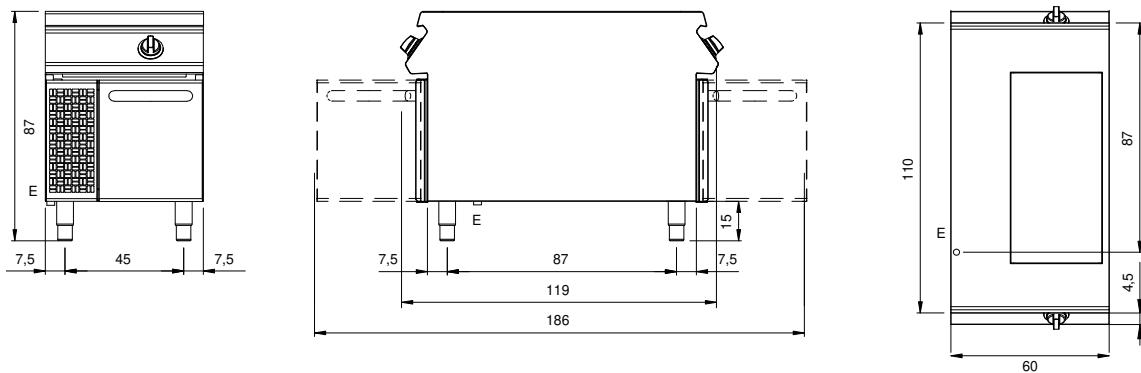
Technical data

Modularity:	On open cabinet
Dimensions (mm):	600x1100x870
Total electric power (kW):	10
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,574
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	86
Gross volume (m3):	1,426

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection

Electric full-coverage induction cooking top on open compartment. Sides, bottom and rear panel in stainless steel. Cooking surface in glass-ceramic, hermetically sealed to the top. Heating is activated by a pot detection system when cookware is placed on the surface. Indicator lamp shows heating activation and correct appliance operation. Unit designed for head-to-head joint installation. Labyrinth-type control knobs prevent water ingress during cleaning operations on both sides. Base entirely made of stainless steel. Height-adjustable stainless steel feet. Protection rating IPX5. Electrical supply 400 VAC 3N 50/60 Hz - 10 kW.

Technical draw

E: Electric power