modular



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/60INDC/A **Cod:** MP01135125121

Technical data

Modularity:	On open cabinet
Dimensions (mm):	600x1100x870
Total eletric power (kW):	10
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,574
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	86
Gross volume (m3):	1,426

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Full coverage induction plate, on open cabinet

Electric full-coverage induction cooking top on open compartment. Sides, bottom and rear panel in stainless steel. Cooking surface in glass-ceramic, hermetically sealed to the top. Heating is activated by a pot detection system when cookware is placed on the surface. Indicator lamp shows heating activation and correct appliance operation. Unit designed for head-to-head joint installation. Labyrinth-type control knobs prevent water ingress during cleaning operations on both sides. Base entirely made of stainless steel. Height-adjustable stainless steel feet. Protection rating IPX5. Electrical supply 400 VAC 3N 50/60 Hz – 10 kW.

Technical draw

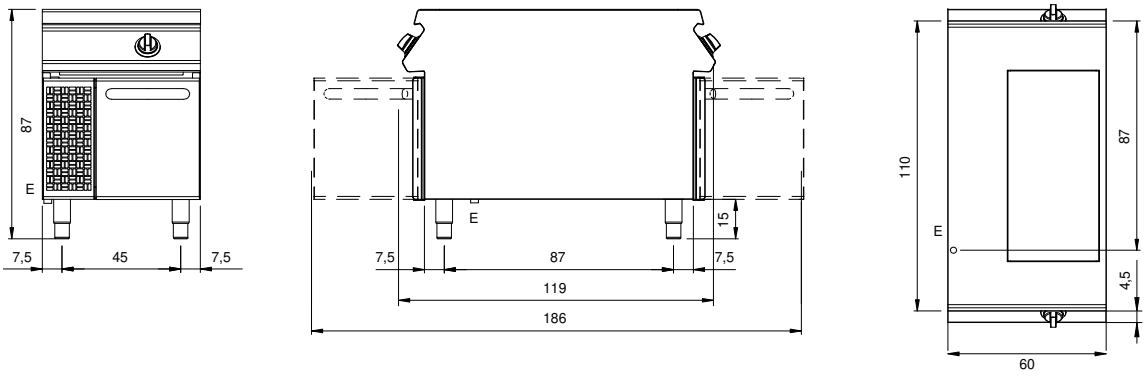

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.