



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/60INDC/P

Cod: MP01135125122

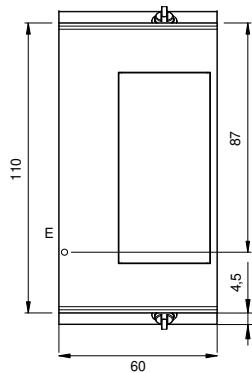
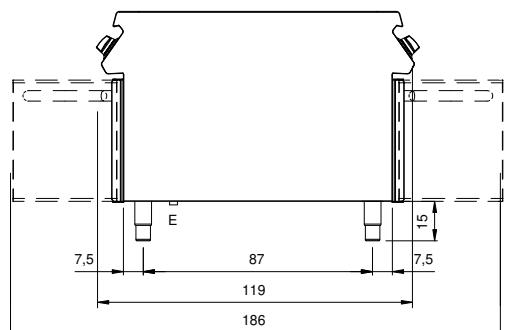
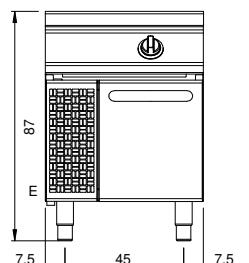
Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	600x1100x870
Total electric power (kW):	10
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,574
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	92
Gross volume (m3):	1,426

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines

Electric full-coverage induction cooking top with cabinet and hinged doors. Sidewalls, base and rear panel in stainless steel. Cooking surface in glass-ceramic hermetically sealed to the top. Heating is activated by a cookware recognition system when pots are placed on the surface. Indicator lamp signals heating activation and correct appliance operation. Prepared for butt-joint installation. Labyrinth-style control knobs that prevent water ingress during cleaning operations on both sides. Base entirely made of stainless steel. Hinged doors with tubular stainless-steel handle. Stainless-steel adjustable feet. Protection rating IP X5. Electrical supply 400 VAC 3N 50/60 Hz - 10 kW.

Technical draw

E: Electric power