modular



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/60INDC/P **Cod:** MP01135125122

Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	600x1100x870
Total eletric power (kW):	10
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,574
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	92
Gross volume (m3):	1,426

Features


Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Full coverage induction plate, on cabinet with door

Electric full-coverage induction cooking top with cabinet and hinged doors. Sidewalls, base and rear panel in stainless steel. Cooking surface in glass-ceramic hermetically sealed to the top. Heating is activated by a cookware recognition system when pots are placed on the surface. Indicator lamp signals heating activation and correct appliance operation. Prepared for butt-joint installation. Labyrinth-style control knobs that prevent water ingress during cleaning operations on both sides. Base entirely made of stainless steel. Hinged doors with tubular stainless-steel handle. Stainless-steel adjustable feet. Protection rating IP X5. Electrical supply 400 VAC 3N 50/60 Hz – 10 kW.

Technical draw

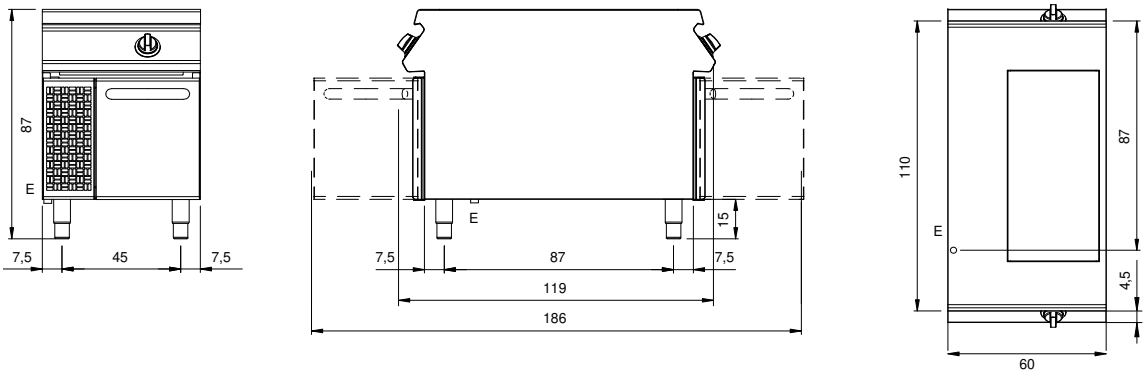

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.