

Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80INDCH/T

Cod: MP01134123070



Technical data


Modularity:	Top
Dimensions (mm):	800x730x280
Total electric power (kW):	10
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,164
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	78,6
Gross volume (m3):	0,835

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable gas exhaust flue grill made of cast iron

Electric full-coverage horizontal induction top model. Sides, bottom and rear panel in stainless steel. Cooking surface in glass-ceramic, hermetically sealed to the top. Heating is activated by a pot detection system when cookware is placed on the surface. Indicator lamp shows heating activation and correct appliance operation. Unit designed for head-to-head joint installation. Labyrinth-type control knobs prevent water ingress during cleaning operations. Equipped with four height-adjustable feet for placement on a worktop. Protection rating IPX5. Electrical supply 400 VAC 3N 50/60 Hz – 10 kW.

Technical draw

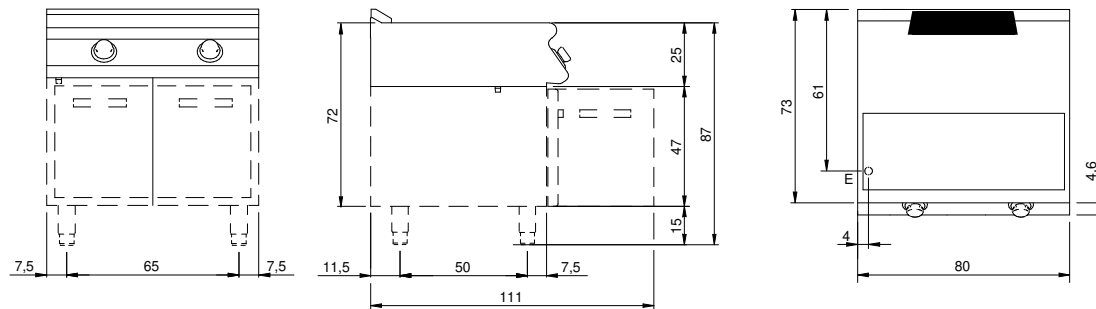

E: Electric power