



Client _____ Quantity _____
Project _____ Position _____

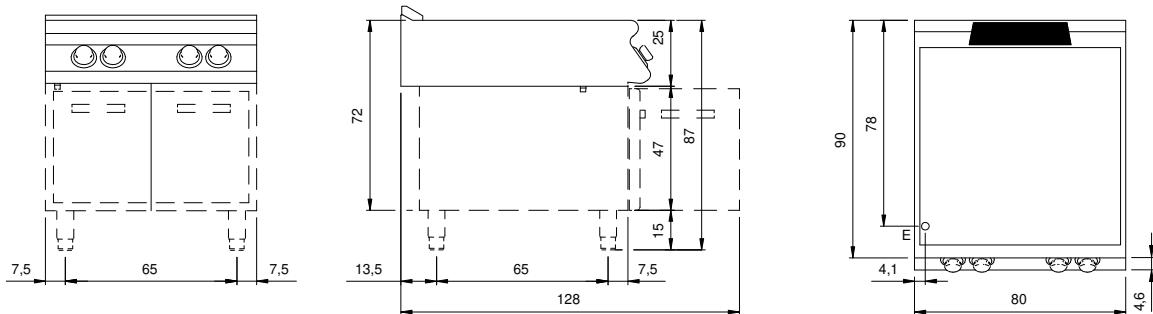
ROC 900**Model:** R90/80INDC/A**Cod:** MP01134124124**Technical data**

Modularity:	On open cabinet
Dimensions (mm):	800x900x870
Total electric power (kW):	20
Electric power (V):	380-415
Ampere (A):	30,5
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Net volume (m3):	0,626
Packing dimensions (mm):	880x1026x1109
Gross weight (kg):	100
Gross volume (m3):	1,001

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron

Electric full-coverage induction cooking top on open compartment. Sides, bottom and rear panel in stainless steel. Cooking surface in glass-ceramic, hermetically sealed to the top. Heating is activated by a pot detection system when cookware is placed on the surface. Indicator lamp shows heating activation and correct appliance operation. Unit designed for head-to-head joint installation. Labyrinth-type control knobs prevent water ingress during cleaning operations. Base entirely made of stainless steel. Height-adjustable stainless steel feet. Protection rating IPX5. Electrical supply 400 VAC 3N 50/60 Hz – 20 kW.

Technical draw

E: Electric power