modular



Client _____ Quantity _____

Project _____ Position _____

REFRIGERATION

Model: TS12/1M-490-07 **Cod:** HT10280000204

Technical data

Modularity:	Without top
Dimensions (mm):	1200x680x590
Total eletric power (kW):	0,25
Electric power (V):	220-240
Ampere (A):	1,15
Frequency (Hz):	50
Net volume (m3):	0,481
Packing dimensions (mm):	1395x800x998
Gross weight (kg):	100
Gross volume (m3):	1,110

Features

Grill:	GN1/1 coated grids
Working top:	Special for overlapping kitchen top modules Roc
Handles:	AISI 304 stainless steel, 2 mm thick
Drawer guides:	Full extension


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Refrigerated base 2 doors -2°+8°C
plug-in

2-door refrigerated base unit. Made entirely of AISI 304 18/10 stainless steel with 60 mm thick insulation obtained with CFC and HCFC-free polyurethane resins. Reversible self-closing doors with 105° stop, equipped with triple chamber geometry gasket with D7 compound. Ventilated refrigeration controlled by digital thermostat. Extractable condensing unit on guides for inspection and cleaning. Automatic hot gas defrosting system and elimination of condensation water by means of the heat dissipated by the refrigerant system. Operation in Climatic Class 5. Energy Class A. Condensing unit incorporated on the right equipped with R290 refrigerant gas with low environmental impact (GWP=3). Temperature -2°/+8° C. Power: 0.25 kW. Voltage: 220-240V/1N/50/60 Hz. Fixing kit to cookign element included

Technical draw

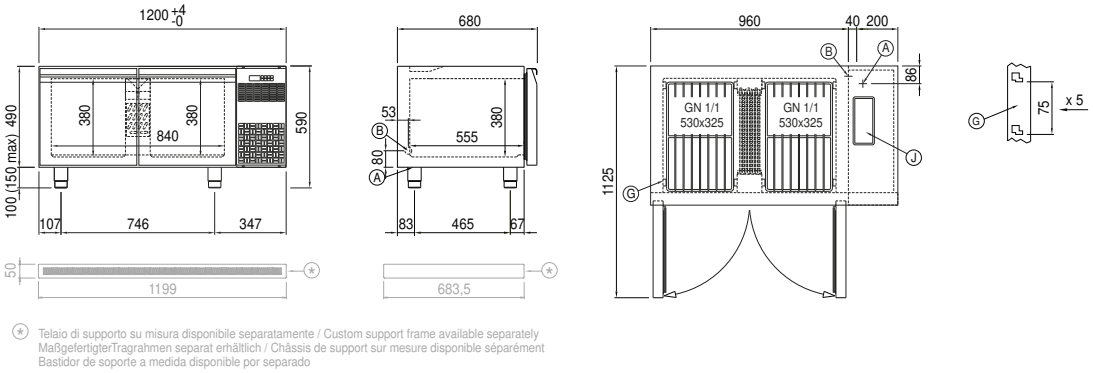

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.