

Client _____ Quantity _____
Project _____ Position _____



REFRIGERATION

Model: TS12/1M-490-07

Cod: HT10280000204

Technical data


Modularity:	Without top
Dimensions (mm):	1200x680x590
Total electric power (kW):	0,25
Electric power (V):	220-240
Ampere (A):	1,15
Frequency (Hz):	50
Net volume (m3):	0,481
Packing dimensions (mm):	1395x800x998
Gross weight (kg):	100
Gross volume (m3):	1,110

Features

Grill:	Plastic coated GN1/1
Working top:	Special for overlapping kitchen top modules Roc
Handles:	AISI 304 stainless steel, 2 mm thick
Drawer guides:	Full extension

2-door refrigerated base unit. Made entirely of AISI 304 18/10 stainless steel with 60 mm thick insulation obtained with CFC and HCFC-free polyurethane resins. Reversible self-closing doors with 105° stop, equipped with triple chamber geometry gasket with D7 compound. Ventilated refrigeration controlled by digital thermostat. Extractable condensing unit on guides for inspection and cleaning. Automatic hot gas defrosting system and elimination of condensation water by means of the heat dissipated by the refrigerant system. Operation in climatic class 5. Energy Class A. Condensing unit incorporated on the right equipped with R290 refrigerant gas with low environmental impact (GWP=3). Temperature -2°/+8° C. Power: 0.25 kW. Voltage: 220-240V/1N/50Hz. Fixing kit to cookign element included.

Technical draw

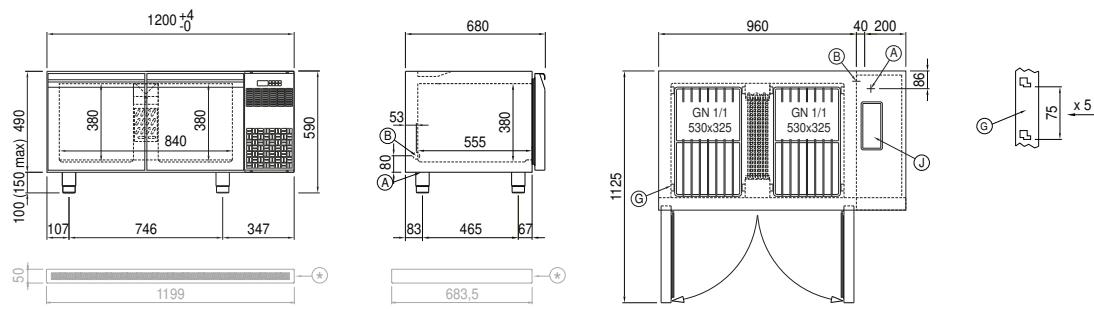

(*) Telai di supporto su misura disponibile separatamente / Custom support frame available separately
 Maßgefertigter Tragrahmen separat erhältlich / Châssis de support sur mesure disponible séparément
 Bastidor de soporte a medida disponible por separado

G: Gas connection 1/2"