modular



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/40CPGG/1V26/P **Cod:** MP01214113021

Technical data

Modularity:	On cabinet with door
Dimensions (mm):	400x730x870
Total gas power (Kcal/h):	7911
Total gas power (kW):	9,2
Nr. Wells:	1
Well litres 1:	26
Well dimensions 1 (mm):	306x342x318
Gas connection:	1/2"
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1"
Net volume (m3):	0,254
Packing dimensions (mm):	480x856x1075
Gross weight (kg):	57,6
Gross volume (m3):	0,442

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron
Water inflow:	With tap
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Full gas pasta cookers, 1 well 26 liters

Full-gas pasta cooker, single tank, 26-liter capacity. Sides, bottom and rear panel in stainless steel. Worktop in AISI 304 stainless steel, 2 mm thick, stamped with overflow-prevention recess. Rear chimney in enameled cast iron; designed for head-to-head installation. Tanks stamped in polished AISI 316 stainless steel with radiused bottom. Water filling via manual valve operated by knob on the front control panel. Filling pressure switch prevents heating when the tank is empty. Option for initial or recovery rapid filling. Fixed stainless steel water dispenser located under the draining top. Heating via stainless steel burners with stabilized flame, pilot burner and safety thermocouple. Ignition by piezoelectric device. Heating adjustable via gas valve. Water discharge via tap located inside the base. Labyrinth-type control knobs prevent water ingress during cleaning operations. Unit equipped with height-adjustable stainless steel feet. Baskets not included. Protection rating IPX5. Total gas power 10.5 kW.

Technical draw

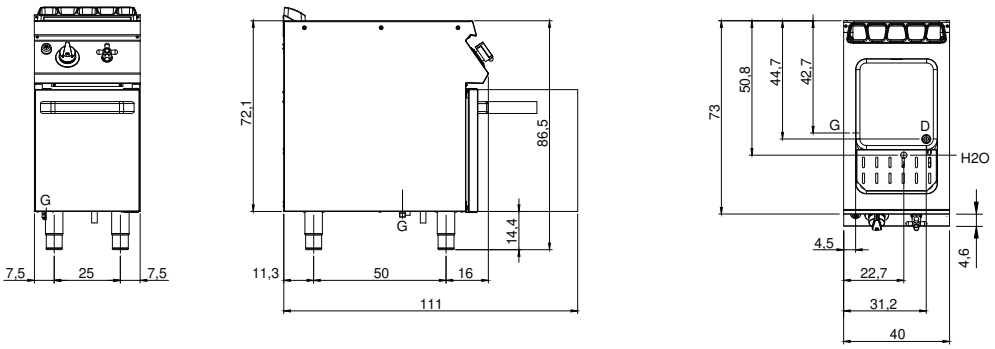

G: Gas connection 1/2"

D: Drain for water

H2O: Water inflow 3/4"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.