

Client _____ Quantity _____
Project _____ Position _____



REFRIGERATION

Model: TS12/1BR-490-07

Cod: HT10280000414

Technical data


| | |
|----------------------------|--------------|
| Modularity: | Without top |
| Dimensions (mm): | 1200x680x590 |
| Total electric power (kW): | 0,92 |
| Electric power (V): | 220-240 |
| Ampere (A): | 4,2 |
| Frequency (Hz): | 50-60 |
| Net volume (m3): | 0,481 |
| Packing dimensions (mm): | 1395x800x998 |
| Gross weight (kg): | 70 |
| Gross volume (m3): | 1,110 |

Features

| | |
|----------------|---|
| Grill: | Plastic coated GN1/1 |
| Working top: | Special for overlapping kitchen top modules Roc |
| Handles: | AISI 304 stainless steel, 2 mm thick |
| Drawer guides: | Full extension |

2-door freezer base unit, remote engine. Made entirely of AISI 304 18/10 stainless steel with 60 mm thick insulation obtained with CFC and HCFC-free polyurethane resins. Reversible self-closing doors with 105° stop, equipped with triple chamber geometry gasket with D7 compound. Ventilated refrigeration controlled by digital thermostat. Automatic electric defrosting system and elimination of condensation water by means of the heat dissipated by the refrigerant system. Operation in Climatic Class 5. Set up for R452A gas operation. Temperature -15°/-22° C. Power: 0.95 kW. Voltage: 220-240V/1N/50Hz. Fixing kit to cookign element included. Engine not included

Technical draw

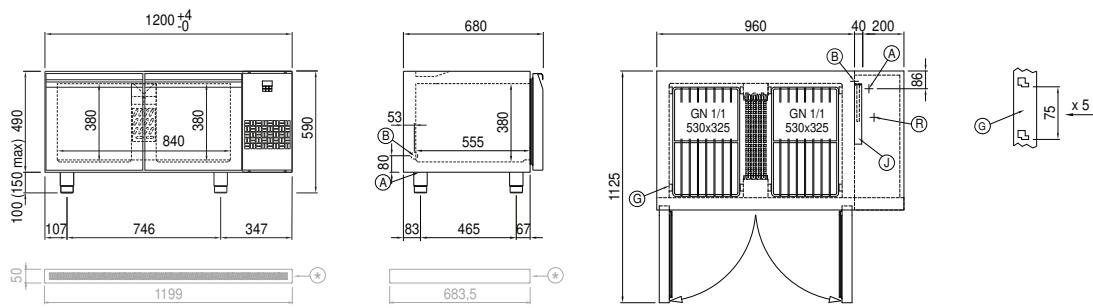

(*) Telaio di supporto su misura disponibile separatamente / Custom support frame available separately
 Maßgefertigter Tragrahmen separat erhältlich / Châssis de support sur mesure disponible séparément
 Bastidor de soporte a medida disponible por separado

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.