



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## ROC 900

Model: R90/40CPGG/1V40/P

Cod: MP01214114021

### Technical data


Modularity:	On cabinet with door
Dimensions (mm):	400x900x870
Total gas power (Kcal/h):	9458
Total gas power (kW):	11
Nr. Wells:	1
Well litres 1:	40
Well dimensions 1 (mm):	306x508x316
Gas connection:	1/2"
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1"
Net volume (m3):	0,313
Packing dimensions (mm):	480x1026x1075
Gross weight (kg):	68
Gross volume (m3):	0,529

### Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron
Water inflow:	With tap
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Full-gas pasta cooker, single tank, 40-liter capacity. Sides, bottom and rear panel in stainless steel. Worktop in AISI 304 stainless steel, 2mm thick, stamped with overflow-prevention recess. Rear chimney in enameled cast iron; designed for head-to-head installation. Tank stamped in polished AISI 316 stainless steel with radiused bottom. Water filling via manual valve operated by knob on the front control panel. Filling pressure switch prevents heating when the tank is empty. Option for initial or recovery rapid filling. Fixed stainless steel water dispenser located under the draining top. Heating via stainless steel burners with stabilized flame, pilot burner and safety thermocouple. Ignition by piezoelectric device. Heating adjustable via gas valve. Water discharge via tap located inside the base. Labyrinth-type control knobs prevent water ingress during cleaning operations. Unit equipped with height-adjustable stainless steel feet. Baskets not included. Protection rating IPX5. Total gas power 11.8kW.

## Technical draw

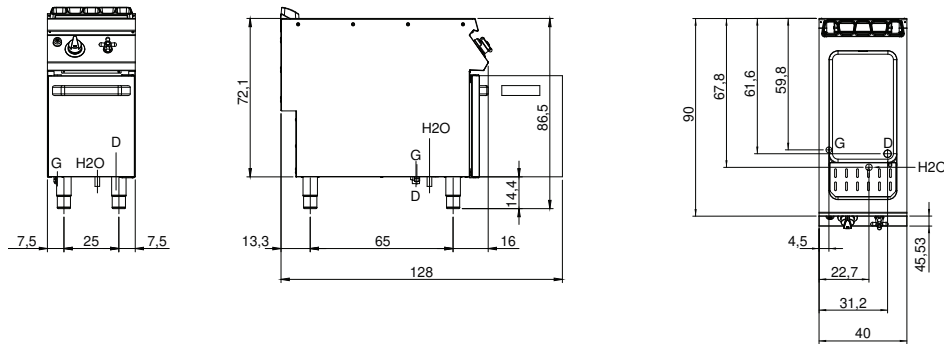

G: Gas connection 1/2"

D: Drain for water

H2O: Water inflow 3/4"