



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## ROC 700

Model: R70/40PCEQ/P

Cod: MP01014123052

### Technical data


|                            |                      |
|----------------------------|----------------------|
| Modularity:                | On cabinet with door |
| Dimension (mm):            | 400x730x870          |
| Total electric power (kW): | 5,2                  |
| Electric power (V):        | 380-415              |
| Ampere (A):                | 12                   |
| Phases:                    | 3N                   |
| Cable section (mmq):       | 5G1,5                |
| Frequency (Hz):            | 50-60                |
| Net volume (m3):           | 0,254                |
| Packing dimensions (mm):   | 480x856x1075         |
| Gross weight (kg):         | 50,6                 |
| Gross volume (m3):         | 0,442                |

### Features

|              |  |
|--------------|--|
| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm                          |
| Knobs:       | Made of aluminum with IPX5 water protection  |
| Handles:     | The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines |
| Flue:        | Removable gas exhaust flue grill made of cast iron                                     |

Electric hob with 2 square plates, model on counter with door. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Rear flue made in enamelled cast-iron. N° 2 square electric plates dim. 220X220 mm each with 2.6 kW, equipped with safety thermostat and automatic recovery. 6 levels temperature control for each plate. Lamp on control panel to indicate the activation of electric supply and plates operation. Special design knobs to avoid water penetration in the control panel. Base completely made in stainless steel. Pressed hinged door. Ergonomic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 5.2 kW.

## Technical draw

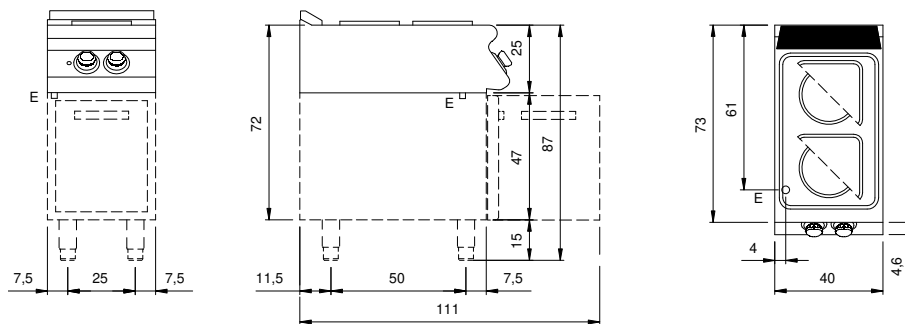

E: Electric power