[라] modular



Client	Quantity
Project	Position

ROC 1100

Model: R110/100PCEQ/P Cod: MP01015125004

Technical data

Modularity:	On cabinet with doors
Dimension (mm):	1000x1100x870
Total eletric power (kW):	16
Electric power (V):	380-415
Ampere (A):	36,5
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Net volume (m3):	0,957
Packing dimensions (mm):	1280x1272x1274
Gross weight (kg):	138
Gross volume (m3):	2,074


Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric hob with 4 square plates, model on cabinet with door. Side panels, bottom and back made of stainless steel. Pressed top made of AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Lateral flue made of stainless steel. Nr. 4 square electric plates 300x300 mm each with 4 kW, equipped with safety thermostat and automatic recovery. 6 levels temperature control for each plate. Lamps on control panel to indicate the activation of electric supply and plates operation. Special design knobs to avoid water penetration in the control panel on both sides. Base completely made of stainless steel. Door with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 16 kW.

Technical draw

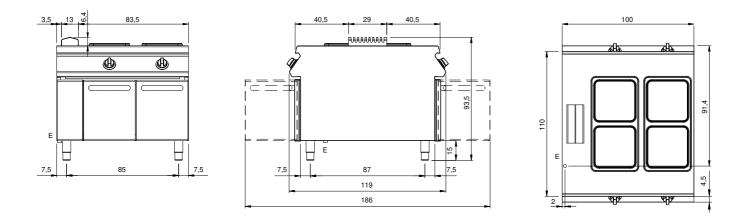

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.