



Client _____ Quantity _____
Project _____ Position _____

FUN 700

Model: F70/70CFE

Cod: MP01032123000

Technical data


Modularity:	Electric oven
Dimensions (mm):	700x700x850
Oven dimension (mm):	565x330x325
Total electric power (kW):	14,36
Oven type:	Electric convection oven
Oven power (kW):	3,96
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	29,5
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50
Net volume (m3):	0,417
Packing dimensions (mm):	776x776x1180
Gross weight (kg):	87
Gross volume (m3):	0,711

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer

Electric range with electric convection oven. Top with deep funnel in AISI 304 stainless steel; covering in AISI 430 stainless steel thickness 8/10; bottoms and internal parts in anti-corrosion material (aluminised sheet metal). Hob with cast iron electric plates Ø 180 mm with stainless steel edge sealed to top. Six different temperature adjustments for each plate. Indicator lights to show electrical power supplied and plates in operation. Power: 4 plates x 2 kW ea. Total power of hob: 8 kW. Electric convection oven in enamelled steel with double wall insulated door equipped with balancing springs. The thermally insulated chamber can hold pans in 4 positions. Forced convection operation by means a motor with a stainless steel fan rotor. Heating is by means of a thermostat-controlled heating element with temperature adjustment from 50 to 300°C + 1 grill heating element. The oven is equipped with a main switch, thermostat, indicator lights to show proper operation, chamber illumination light. Usable volume: 50 lt. Equipped with: 1 rack 445x350 mm. 1 drip pan 445x350x30h. mm. Oven power: 3 kW. Total power 11 kW. Electrical power supply VAC 400+3N 50 Hz.

Technical draw

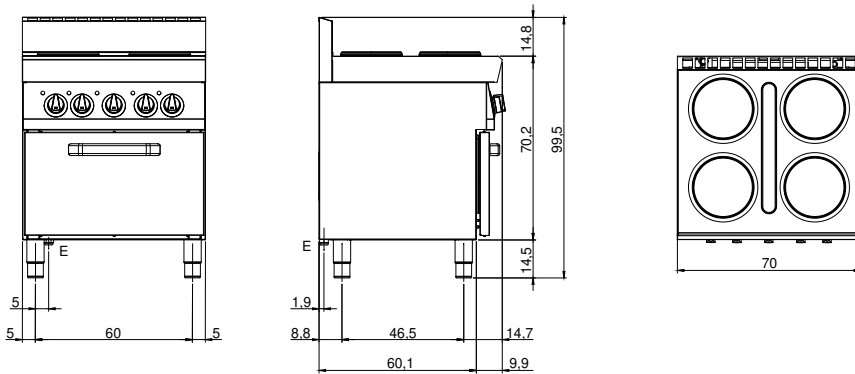

E: Electric power