



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/100CFEQ

Cod: MP01035125001

Technical data


Modularity:	Electric oven
Dimension (mm):	1000x1100x870
Oven dimension (mm):	555x1015x255
Total electric power (kW):	25
Oven type:	Static oven
Oven power (kW):	9
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	50
Phases:	3N
Cable section (mmq):	5G10
Frequency (Hz):	50-60
Net volume (m3):	0,957
Packing dimensions (mm):	1280x1272x1274
Gross weight (kg):	170
Gross volume (m3):	2,074

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel

Electric hob with 4 square plates on electric oven. Side panels, bottom and back made of stainless steel. Pressed top made of AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Lateral flue made of stainless steel. N° 4 square electric plates 300x300 mm each with 4 kW, equipped with safety thermostat and automatic recovery. 6 levels temperature control for each plate. 6 levels temperature control for each plate. Lamps on control panel to indicate the activation of electric supply and plates operation. Electric oven GN 2/1. Heating by electric upper and lower heating elements with independent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made of stainless steel. Oven inner door made of stainless steel with labyrinth seal. Oven power 9 kW. Door with stainless steel tubular handle. Special design knobs to avoid water penetration in the control panel on both sides. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 25 kW.

Technical draw

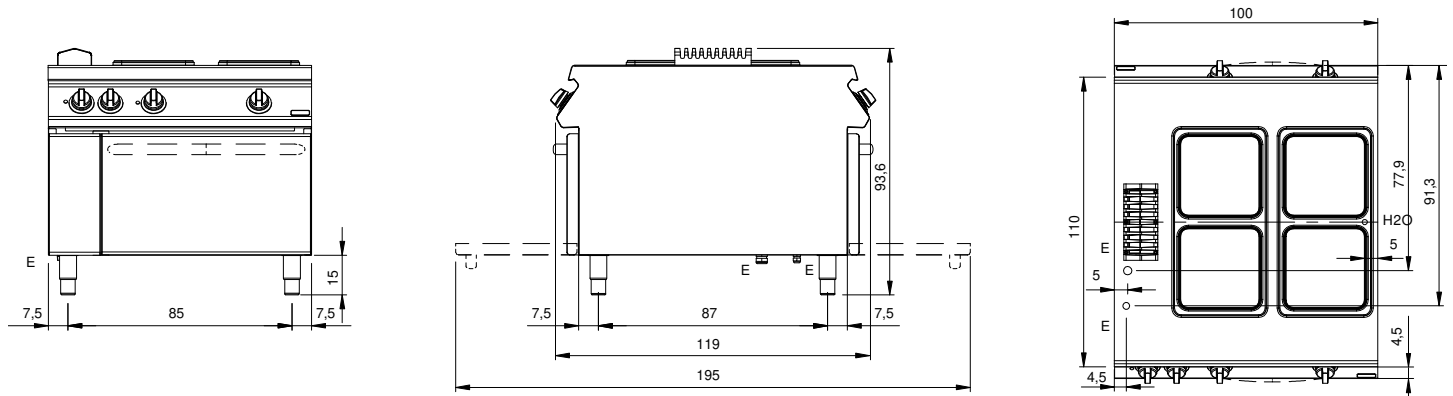

E: Electric power