modular



Client _____ Quantity _____

Project _____ Position _____

## FUN 700

**Model:** F70/80TPFE **Cod:** MP01052123002

### Technical data

| | |
|---|---|
| **Modularity:** | Electric oven |
| **Dimensions (mm):** | 800x700x850 |
| **Oven dimension (mm):** | 565x330x325 |
| **Total eletric power (kW):** | 13,96 |
| **Oven type:** | Electric convection oven |
| **Oven power (kW):** | 3,96 |
| **Oven temperature range (°C):** | 50-300 |
| **Electric power (V):** | 380-415 |
| **Ampere (A):** | 29 |
| **Phases:** | 3N |
| **Cable section (mmq):** | 5G6 |
| **Frequency (Hz):** | 50 |
| **Drain size:** | 1" |
| **Net volume (m3):** | 0,48 |
| **Packing dimensions (mm):** | 880x856x1274 |
| **Gross weight (kg):** | 130 |
| **Gross volume (m3):** | 0,960 |

### Features

| | |
|---|---|
| **Working top:** | Made of AISI 304 stainless steel with a thickness of 10/10 mm |
| **Knobs:** | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Electric solid top, electric convection oven

Electric solid top with 4 zones with electric convection oven. Top made of AISI 304 stainless steel thickness 10/10; covering in AISI 304 stainless steel thickness 10/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Cooking plate made with high thick steel 16M06. 4 indipendent cooking zones each with 2.5 kW power, marked with a satin cooking surface. Safety thermosat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Electric convection oven Made of enamelled steel with double wall isolated door on hinges with balancing springs. The chamber is thermally insulated and equipped with side rack supports with the possibility to insert 3 pans GN 1/1 h. 65 mm. Forced convection operation by means of stainless steel fan rotor. Heating takes place by means of 3 thermostat controlled heating elements with a range of adjustment from 100° to 300° C. Equipped with thermostat controlled main switch and indicator light to show proper operation. Internal dimensions 530x340x325h. mm. Equipped with 1 rack GN 1/1. 4 plates 4x2.5 kW. Oven power 3.96 kW. Total power 13.96 kW Electrical power supply VAC 400 + 3N 50/60 Hz.

## Technical draw

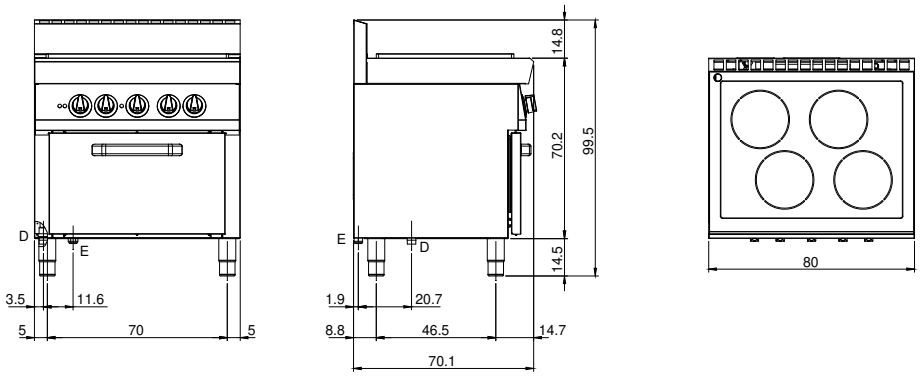


**E:** Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.