[라] modular



Client	Quantity
Project	Position

ROC 700

Features

Model: R70/80TPG/A

Cod: MP01054113002

Technical data


Modularity:	On open cabinet
Dimension (mm):	800x730x870
Total gas power (Kcal/h):	7739
Total gas power (kW):	9
Whole-plate power gas (kW):	9
Gas connection:	1/2"
Net volume (m3):	0,508
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	100,5
Gross volume (m3):	0,835

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Gas solid top range, model on open counter. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking plate made in extra-thick cast iron with extractable central plate. The central zone can reach 500°c while decreasing awards (to 300 °C). Heating by cast iron burner with 9 kW power. Gas supply by means of safety tap with pilot flame and safety thermocouple. lignition by means of piezoelectric device with waterproof cap. Plate dimensions 760x540. Special design knobs to avoid water penetration in the control panel.Base completely made in stainless steel. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 9 kW.

Technical draw

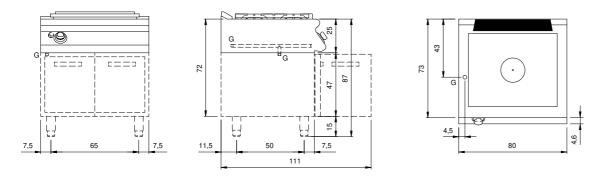

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.