

Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/120TPPGF/T

Cod: MP01054113010



Technical data


Modularity:	Top
Dimension (mm):	1200x730x280
Total gas power (Kcal/h):	23646
Total gas power (kW):	27,5
Whole-plate power gas (kW):	6
Gas connection:	1/2"
Net volume (m3):	0,245
Packing dimensions (mm):	1280x856x509
Gross weight (kg):	121,6
Burner power 1 (kW):	3,5
Burner power 2 (kW):	6
Burner power 3 (kW):	6
Burner power 4 (kW):	6
Gross volume (m3):	0,558

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable gas exhaust flue grill made of cast iron
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas solid top range with 4 burners, model top. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking plate made in extra-thick cast iron with extractable central plate. The central zone can reach 500°C while decreasing awards (to 300 °C). Heating by cast iron burner with 6 kW power. Gas supply by means of safety tap with pilot flame and safety thermocouple. Ignition by means of piezoelectric device with waterproof cap. Plate dimensions 380x710. Rapid burners made in cast iron and brass sealed to the top. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radiused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistant to acid, alkali and flame. Nr.3 burners 6 kW and nr.1 burner 3,5 kW. (Available burner powers 3,5 kW, 6 kW, 7,5 kW, 10 kW). Special design knobs to avoid water penetration in the control panel. Base completely made in stainless steel. Pressed hinged door. Ergonomic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 27,5 kW.

Technical draw

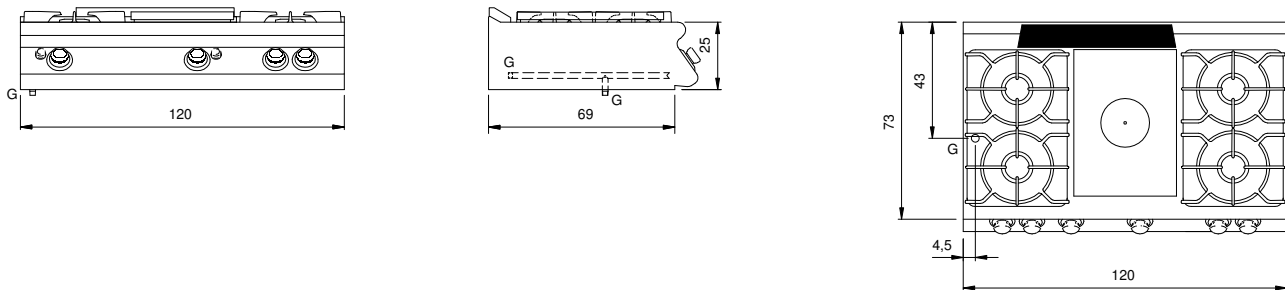

G: Gas connection 1/2"