modular



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80TPE/A **Cod:** MP01054123002

Technical data

Modularity:	On open cabinet
Dimensions (mm):	800x730x870
Total eletric power (kW):	10
Electric power (V):	380-415
Ampere (A):	23
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,508
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	114
Gross volume (m3):	0,835


Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable gas exhaust flue grill made of cast iron

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric solid top with 4 zones, model on open counter. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking plate made with high thick steel 16M05. 4 indipendent cooking zones each with 2.5 kW power, marked with a satin cooking surface. Safety thermosat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Special design knobs to avoid water penetration in the control panel. Base completely made in stainless steel. Adjustable feet made in stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 10 kW.

Technical draw

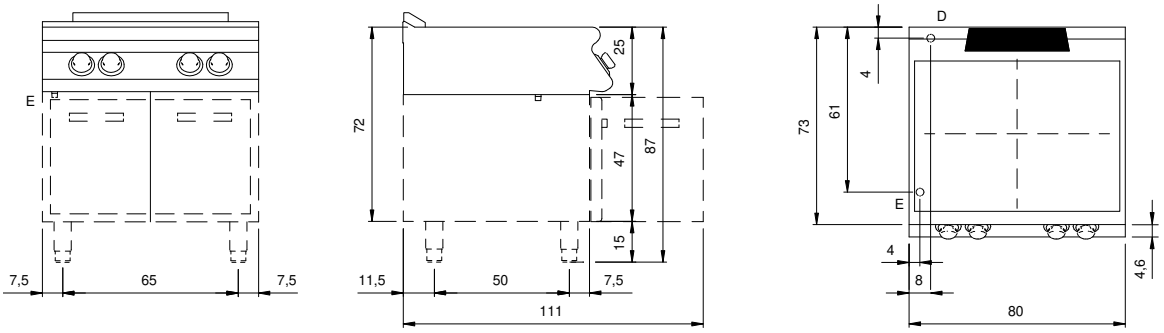

E: Electric power

D: Drain for water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.