modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/80TPFE **Cod:** MP01054124030

Technical data

Modularity:	Electric oven
Dimensions (mm):	800x900x870
Oven dimension (mm):	555x660x257
Total eletric power (kW):	19,6
Oven type:	Static oven
Oven power (kW):	6
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	31
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,626
Packing dimensions (mm):	880x1026x1109
Gross weight (kg):	181
Gross volume (m3):	1,001

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable made of cast iron


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Electric solid top, electric static oven

Electric solid top with 4 zones on electric static oven. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 con invaso per la raccolta dei liquidi e foro di scarico. Rear flue made in enamelled cast-iron; designed for flush alignment. Cooking plate made with high thick steel 16M06. 4 indipendent cooking zones each with 3.4 kW power, marked with a satin cooking surface. Safety thermosat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Electric oven GN 2/1. Heating by electric upper and lower heating elements with indipendent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made in stainless steel. Oven inner door made in stainless steel with labyrinth seal. Oven power 6 kW. Special design knobs to avoid water penetration in the control panel.IPX5 protection rating. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50/60 Hz - 19,6 kW.

Technical draw

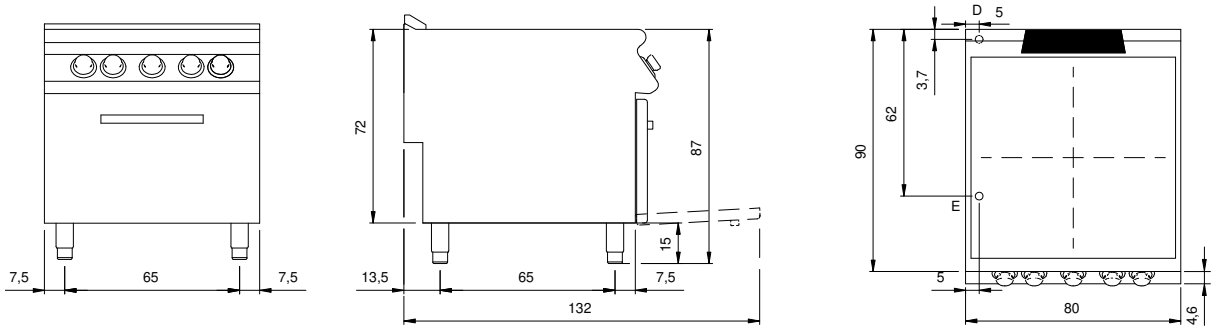

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.