



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80PVE/A

Cod: MP01094123005

Technical data


| | |
|----------------------------|-----------------|
| Modularity: | On open cabinet |
| Dimensions (mm): | 800x730x870 |
| Total electric power (kW): | 10 |
| Electric power (V): | 380-415 |
| Ampere (A): | 23 |
| Phases: | 3N |
| Cable section (mmq): | 5G4 |
| Frequency (Hz): | 50-60 |
| Net volume (m3): | 0,508 |
| Packing dimensions (mm): | 880x856x1109 |
| Gross weight (kg): | 62,6 |
| Gross volume (m3): | 0,835 |

Features

| | |
|--------------|---|
| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
| Knobs: | Made of aluminum with IPX5 water protection |
| Flue: | Removable gas exhaust flue grill made of cast iron |

Glass ceramic hob with 4 cooking zones, model on open counter. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top with 4 independent cooking zone each equipped with a 2.5 kW radiating element diam.230 mm. and relevant energy regulator. Top designed for flush alignment. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation. Special design knobs to avoid water penetration in the control panel. IPX5 protection rating. Base completely made in stainless steel. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50÷60 Hz - 10 kW.

Technical draw

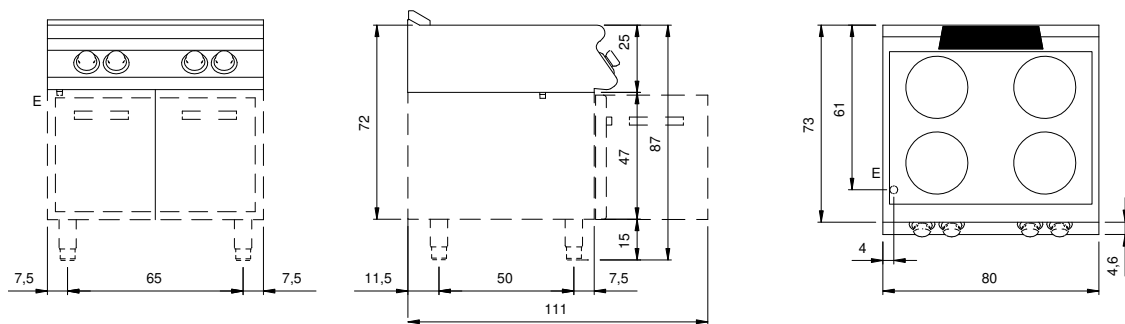

E: Electric power