



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

**ROC 900**

Model: R90/80CFVE Cod: MP01094124030

**Technical data**


|                              |               |
|------------------------------|---------------|
| Modularity:                  | Electric oven |
| Dimension (mm):              | 800x900x870   |
| Oven dimension (mm):         | 555x660x257   |
| Total electric power (kW):   | 19,6          |
| Oven type:                   | Static oven   |
| Oven power (kW):             | 6             |
| Oven temperature range (°C): | 50-300        |
| Electric power (V):          | 380-415       |
| Ampere (A):                  | 31            |
| Phases:                      | 3N            |
| Cable section (mmq):         | 5G6           |
| Frequency (Hz):              | 50-60         |
| Net volume (m3):             | 0,626         |
| Packing dimensions (mm):     | 880x1026x1109 |
| Gross weight (kg):           | 130           |
| Gross volume (m3):           | 1,001         |

**Features**

|              |  |
|--------------|--|
| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm                          |
| Knobs:       | Made of aluminum with IPX5 water protection  |
| Handles:     | The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines |
| Flue:        | Removable made of cast iron  |

Glass ceramic range 4 zones on electric static oven. Side panels, bottom and back made in stainless steel. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top with 4 independent cooking zone each equipped with a 3 kW radiating element diam.300 mm. and relevant energy regulator. tp designed for flush alignment. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation. Electric static oven GN 2/1. Heating by electric upper and lower heating elements with independent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made in stainless steel. Oven inner door made in stainless steel with labyrinth seal. Oven power 6 kW. Special design knobs to avoid water penetration in the control panel. IPX5 protection rating. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50÷60 Hz - 19,6 kW.

## Technical draw

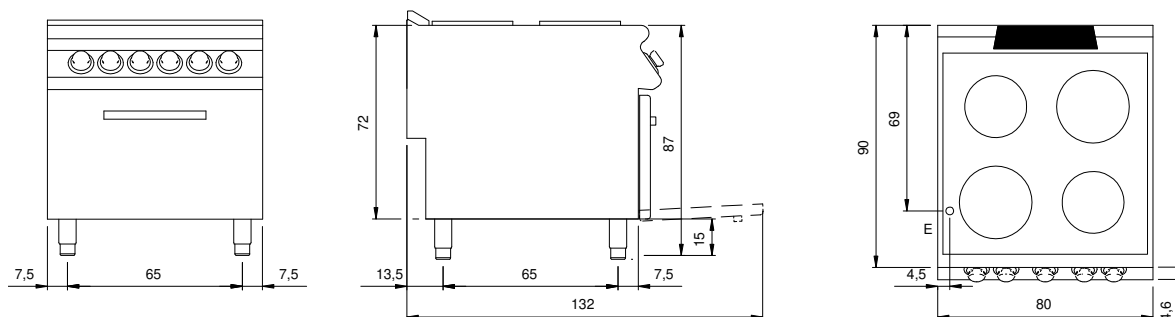

E: Electric power