modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/80CFVEV **Cod:** MP01094124031

Technical data

Modularity:	Electric oven
Dimensions (mm):	800x900x870
Oven dimension (mm):	555x655x255
Total eletric power (kW):	19,6
Oven type:	Electric convection oven
Oven power (kW):	6
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	30,9
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Net volume (m3):	0,626
Packing dimensions (mm):	880x1026x1109
Gross weight (kg):	130
Gross volume (m3):	1,001

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable made of cast iron


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Infrared surface 4 cooking zones,
electric convection oven

Glass ceramic range 4 zones on electric ventilated oven. Side panels, bottom and back made in stainless steel. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top with 4 indipendent cooking zone each equipped with a 3 kW radiating element diam.300 mm. and relevant energy regulator. tp designed for flush alignment. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation. Electric ventilated oven GN 2/1. Heating by electric upper and lower heating elements with indipendent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made in stainless steel. Oven inner door made in stainless steel with labyrinth seal. Oven power 6 kW. Special design knobs to avoid water penetration in the control panel.IPX5 protection rating. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50/60 Hz - 19,6 kW.

Technical draw

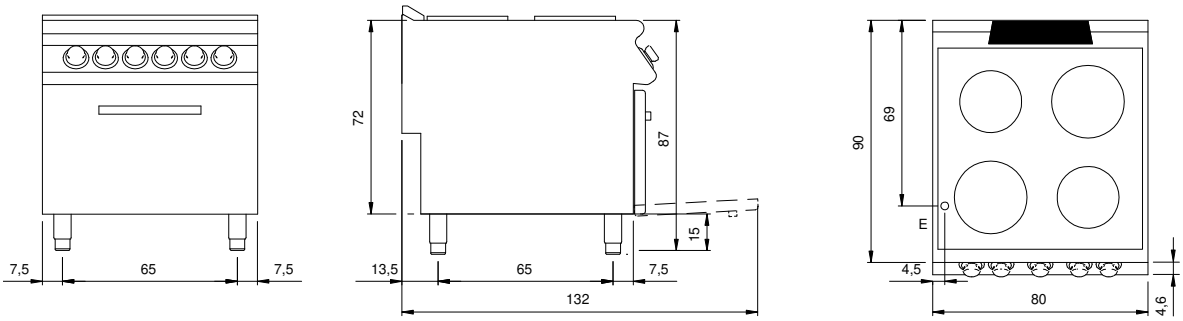

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.