



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/60IND/P

Cod: MP01135125002

Technical data


| | |
|----------------------------|-----------------------|
| Modularity: | On cabinet with doors |
| Dimension (mm): | 600x1100x870 |
| Total electric power (kW): | 10 |
| Electric power (V): | 380-415 |
| Ampere (A): | 15,5 |
| Phases: | 3N |
| Cable section (mmq): | 5G2,5 |
| Frequency (Hz): | 50-60 |
| Net volume (m3): | 0,574 |
| Packing dimensions (mm): | 880x1272x1274 |
| Gross weight (kg): | 92 |
| Gross volume (m3): | 1,426 |

Features

| | |
|--------------|--|
| Working top: | Made of AISI 304 stainless steel with a thickness of 2 mm |
| Knobs: | Made of aluminum with IPX5 water protection |
| Handles: | The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines |
| Flue: | Made of AISI 304 stainless steel |

Induction hob with 2 cooking zones, model on cabinet with door. Side panels, bottom and back made of stainless steel. Glass ceramic hob sealed to the top. Lateral flue made of stainless steel. Top designed for flush alignment. Heating is activated by the pots detection system when they are in contact with the plate equipped with 2 independent cooking zones each with 5 kW. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation designed for flush alignment. Special design knobs to avoid water penetration in the control panel on both sides. Base completely made of stainless steel. Door with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 10 kW.

Technical draw

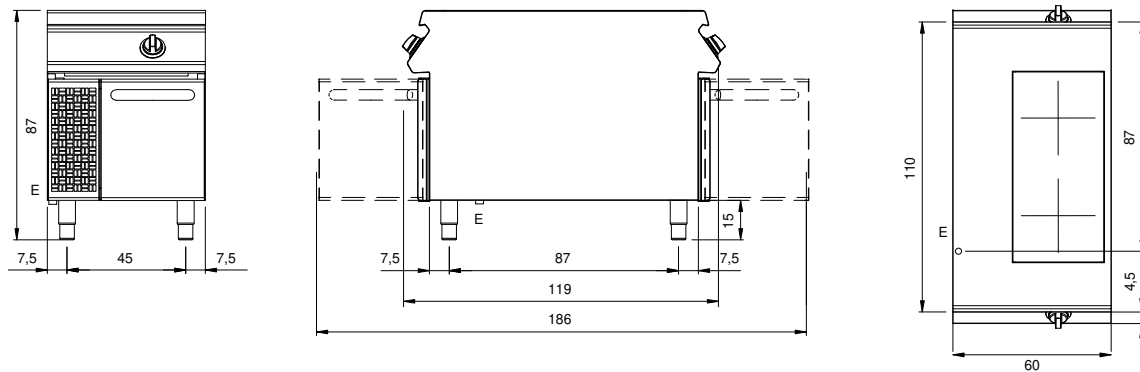

E: Electric power