modular



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/40CPG/1V26/P **Cod:** MP01214113001

Technical data

Modularity:	On cabinet with door
Dimensions (mm):	400x730x870
Total eletric power (kW):	0,1
Total gas power (Kcal/h):	9029
Total gas power (kW):	10,5
Nr. Wells:	1
Well litres 1:	26
Well dimensions 1 (mm):	306x342x318
Gas connection:	1/2"
Electric power (V):	220-240
Ampere (A):	0,5
Phases:	1
Cable section (mmq):	3G1
Frequency (Hz):	50
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1"
Net volume (m3):	0,254
Packing dimensions (mm):	480x856x1075
Gross weight (kg):	57,6
Gross volume (m3):	0,442


Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable gas exhaust flue grill made of cast iron
Water inflow:	With tap
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Gas pasta cookers with 1 well capacity 26 liters, model on closed cabinet. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 with overflow control edge designed for flush alignment. Rear flue made in enamelled cast-iron.Deep drawn well in Aisi 316 polished stainless steel with radiused bottom. Pressure switch to stop heating in case the well is empty. Fast filling and top-up options. Fixed water tap in stainless steel located below draining board. Heating by means of steel burner with stabilized flame complete with pilot flame and safety thermocouple. Automatic ignition by piezoelectric device. Adjustable heating by energy regulator. Lamp on control panel to indicate heating activation. Water drain located inside the lower base. Special design knobs to avoid water penetration in the control panel. Adjustable feet made in stainless steel. Baskets not included. IPX5 protection rating. Gas total power 10.5 kwatt. Electric power supply VAC 230 1N 50/60 Hz - 0,1 kW.

Technical draw

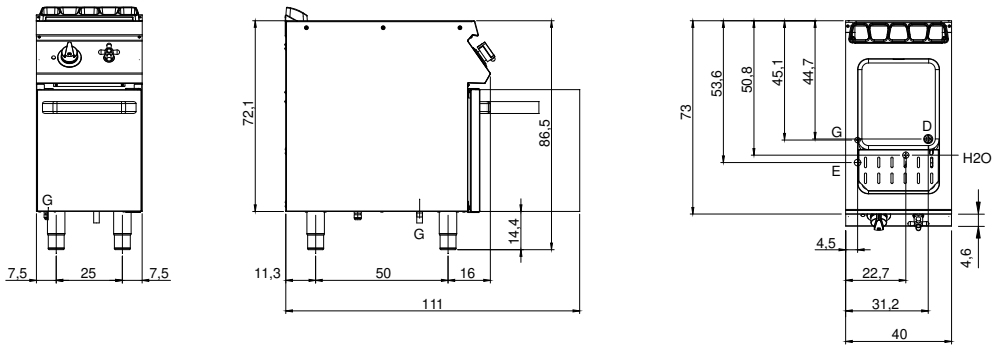

G: Gas connection 1/2"

E: Electric power

H2O: Water inflow 3/4"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.