modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/80CPE/2V40/P **Cod:** MP01214124002

Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	800x900x870
Total eletric power (kW):	17
Nr. Wells:	2
Well litres 1:	40
Well litres 2:	40
Well dimensions 1 (mm):	306x508x316
Well dimensions 2 (mm):	306x508x316
Electric power (V):	380-415
Ampere (A):	26
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Cold water inflow:	3/4" + 3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1" + 1"
Net volume (m3):	0,626
Packing dimensions (mm):	880x1026x1109
Gross weight (kg):	93
Gross volume (m3):	1,001

Features


Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	With tap

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric pasta cookers, 2 wells
40+40 liters

Electric pasta cookers with 2 wells capacity 40+40 liters. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 with overflow control edge designed for flush alignment. Deep drawn wells in AISI 316 polished stainless steel with radiused bottom. Pressure switch to stop heating in case the well is empty. Fast filling and top-up options. Fixed water tap in stainless steel located below draining board. Heating by means of revolving armoured immersion-type heating elements. Heating control by means of energy regulator. Lamp on control panel to indicate heating activation. Water drain located inside the lower base. Special design knobs to avoid water penetration in the control panel. Adjustable feet made in stainless steel. Baskets not included. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 17 kW.

Technical draw

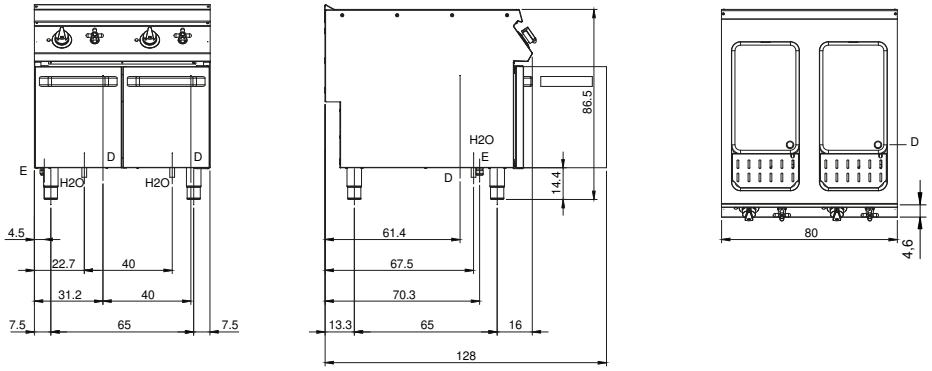

G: Gas connection 1/2"

E: Electric power

D: Drain for water

H2O: Water inflow 3/4"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.