[라] modular



Client	Quantity
Project	Position

FUN 700

Features

Model: F70/40BME/P

Cod: MP01252123004

Technical data


Modularity:	On cabinet with door
Dimension (mm):	400x700x850
Total eletric power (kW):	1,5
Nr. Wells:	1
Well litres 1:	16
Well dimensions 1 (mm):	305x510x155
Electric power (V):	220-240
Ampere (A):	7
Phases:	1
Cable section (mmq):	3G1,5
Frequency (Hz):	50-60
Drain size:	1/2"
Net volume (m3):	0,238
Packing dimensions (mm):	477x776x1147
Gross weight (kg):	40
Gross volume (m3):	0,425

Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti- leakage washer
Handles:	Brushed aluminum finish
Water inflow:	Manual input

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric bain-marie on base with door, 1 tub GN 1/1 h. 15 cm. Top and tub in AISI 304 stainless steel; covering in AISI 304 stainless steel thickness 8/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel. Tub dimensions are GN 1/1 h. 150 mm. Equipped with a control for water drainage by means of ball cock located on the control panel. Heating occurs by means of shielded heating elements which are thermostat controlled in a range of use from 30 to 90°C. Equipped with indicator light to signal proper operation. - 1 false bottom included. - 1 heating element x 1.5 kW. Electrical power supply VAC 230+1 50÷60 Hz. (Bowls not included).

Technical draw

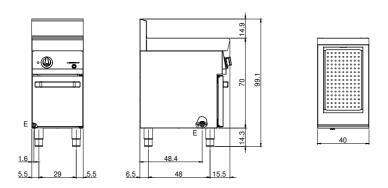

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.