



| Client | Quantity |
|---------|----------|
| Project | Position |

ROC 900

Model: R90/40BMG/P Cod: MP01254114002

Technical data

| Modularity: | On cabinet with door |
|---------------------------|----------------------|
| Dimension (mm): | 400x900x870 |
| Total gas power (Kcal/h): | 2580 |
| Total gas power (kW): | 3 |
| Nr. Wells: | 1 |
| Well litres 1: | 25 |
| Well dimensions 1 (mm): | 351x685x155 |
| Gas connection: | 1/2" |
| Drain size: | 1" |
| Net volume (m3): | 0,313 |
| Packing dimensions (mm): | 480x1026x1075 |
| Gross weight (kg): | 53,6 |
| Gross volume (m3): | 0,529 |


Features


| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
|---------------|--|
| Knobs: | Made of aluminum with IPX5 water protection |
| Handles: | The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines |
| Flue: | Removable made of cast iron |
| Water inflow: | Manual input |
| Kit Gas: | Natural gas conversion kit 30/50 m/bar (tested with natural gas G20) |
| | |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Technical draw

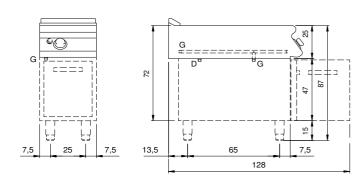



G: Gas connection 1/2"

D: Drain for water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previouly or subsequently sold.