



Client _____ Quantity _____
Project _____ Position _____

ROC 900

Model: R90/80FRGV/2V13/P

Cod: MP01294114002

Technical data


| | |
|---------------------------|-----------------------|
| Modularity: | On cabinet with doors |
| Dimension (mm): | 800x900x870 |
| Total gas power (Kcal/h): | 20637 |
| Total gas power (kW): | 24 |
| Nr. Wells: | 2 |
| Well litres 1: | 13 |
| Well litres 2: | 13 |
| Well dimensions 1 (mm): | 240x342x318 |
| Well dimensions 2 (mm): | 240x342x318 |
| Gas connection: | 1/2" |
| Net volume (m3): | 0,626 |
| Packing dimensions (mm): | 880x1026x1274 |
| Gross weight (kg): | 131 |
| Gross volume (m3): | 1,150 |

Features

| | |
|------------------|--|
| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
| Type of heating: | Direct |
| Knobs: | Made of aluminum with IPX5 water protection |
| Flue: | Removable made of cast iron |
| Heating: | Heating pipes in the well |
| Kit Gas: | Natural gas conversion kit 30/50 m/bar (tested with natural gas G20) |

Gas fryer with 1 wells 13+13 liters, model on cabinet with doors. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Rear flue made in enamelled cast-iron. Deep pressed wells with front expansion zone for oil collection and cold zone for food particles collection. Heating by means of high efficiency stainless steel burners located inside the well. Ignition by means of piezoelectric device. Safety thermostat with manual reset. Equipped with 1 basket 1/1 and 2 baskets 1/2 made of chrome plated steel and thermoplastic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 24 kW.

Technical draw

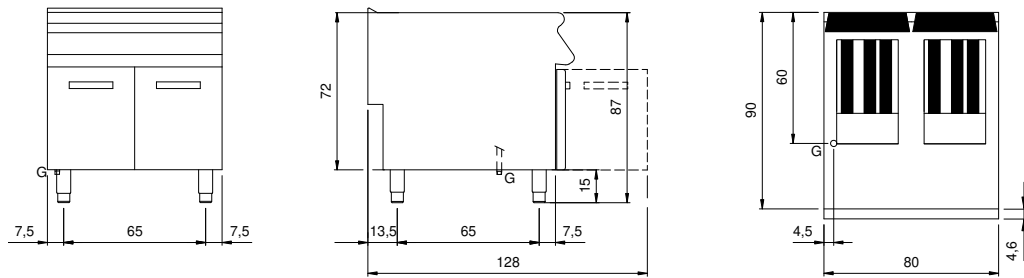

G: Gas connection 1/2"