[라] modular



Client	Quantity
Project	Position

ROC 700

Features

Model: R70/40FRER/1V17/P Cod: MP01294123003

Technical data


Modularity:	On cabinet with door
Dimension (mm):	400x730x870
Total eletric power (kW):	16,5
Nr. Wells:	1
Well litres 1:	17
Well dimensions 1 (mm):	310x345x255
Electric power (V):	380-415
Ampere (A):	25,5
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Net volume (m3):	0,508
Packing dimensions (mm):	480x856x1075
Gross weight (kg):	60,6
Gross volume (m3):	0,442

f AISI 304 stainless steel hickness of 20/10 mm
f aluminum with IPX5 protection
neating elements for t cleaning
)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric fryer 1 well 17 liters, model on cabinet with door. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10. designed for flush alignment. Deep pressed well made in stainless steel AISI 304 with radioused edges with front expansion zone for oil collection and cold zone for food particles collection. Heating elements in Stainless steel AISI 304 located inside the well and revolving by 90° for an easy well cleaning. Temperature control by mechanical thermostat. Safety thermostat with manual reset. Lamp on control panel to indicate heating activaton. Special design knobs to avoid water penetration in the control panel. Adjustable feet made in stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 16,5 kW.

Technical draw

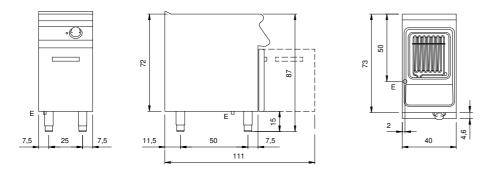

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.