modular

Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/40FRER/1V13/P **Cod:** MP01295125002

Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	400x1100x870
Total eletric power (kW):	12
Nr. Wells:	1
Well litres 1:	13
Well dimensions 1 (mm):	240x345x255
Electric power (V):	380-415
Ampere (A):	18,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,383
Packing dimensions (mm):	480x1272x1240
Gross weight (kg):	113
Gross volume (m3):	0,757

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Type of heating:	Direct
Knobs:	Made of aluminum with IPX5 water protection
Heating:	Rotating heating elements

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric fryer 1 well 13 liters, model on cabinet with doors. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10. Designed for flush alignment. Deep pressed wells made of stainless steel AISI 304 with radioused edges with front expansion zone for oil collection and cold zone for food particles collection. Equipped with drain valve located in the lower neutral compartment. Shielded heating elements can be turned over for cleaning, thermostat-controlled in a range of use from 100° to 190°C. Equipped with main switch and safety thermostat. Lamp on control panel to indicate heating activaton. With 1 basket 1/1 made of chrome plated steel and plastic handle. Special design knob to avoid water penetration in the control panel. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 12 kW.

Technical draw

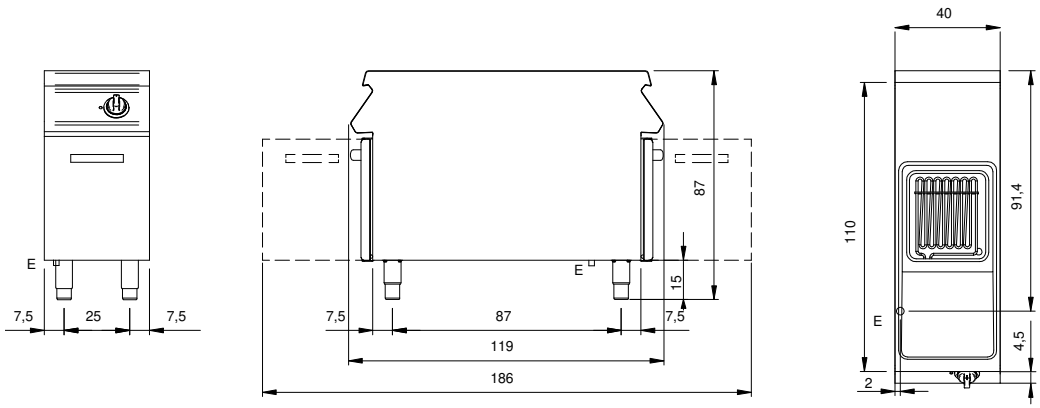

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.