

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 600

Model: F60/30FTE/CL/T

Cod: MP01372121003




### Technical data

Modularity:	Top
Dimension (mm):	300x600x300
Total electric power (kW):	3
Cooking zone dimensions 1 (LxD mm):	296x470
Electric power (V):	380-415
Ampere (A):	5
Phases:	3N
Cable section (mmq):	5G1,5
Frequency (Hz):	50-60
Net volume (m3):	0,054
Packing dimensions (mm):	376x695x596
Gross weight (kg):	26
Gross volume (m3):	0,156

### Features

Working top:	Realizzato in acciaio inox AISI 304 con spessore 8/10 mm
Material of plate:	Polished chrome
Plate finish:	Smooth
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend
Flue:	Made in a single piece, which facilitates the alignment of the modules
Liquid collection container:	Estraibile e lavabile in lavastoviglie
Plate:	Polished chromed plate
Upright Splash guard:	On two sides

## Technical draw

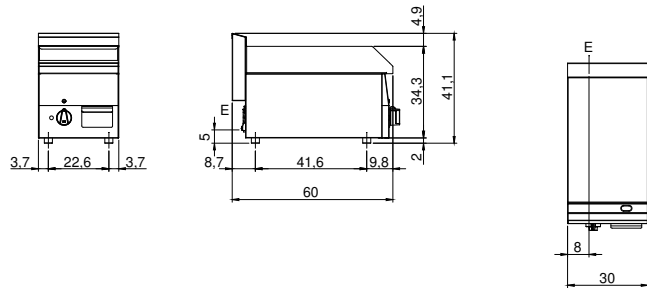

E: Electric power

Gas solid top range on gas oven.

Top made of AISI 304 stainless steel thickness 8/10; covering in AISI 430 stainless steel thickness 8/10; bottoms and internal parts in AISI 430 steel; internal

reinforcements made of anti-corrosion material (aluminised sheet metal). Gas full plate

dimensions 66x54 cm. High-performance plate equipped with

extractable central ring. High-power cast iron burner (1x8.2

kW). Safety gas valve cock with

thermocouple. Piezoelectric

ignition. Oven internal dimensions

53x54x28h. cm. Oven rack

dimensions 53x53 cm. Thermally

insulated double wall oven door.

Thermally insulated oven

chamber. High stability oven

burner. Heating takes place by

means of stabilized flame burner

with piezoelectric ignition; gas is

supplied by means of a

thermostatic safety valve with

thermocouple. Temperature

adjustment from 150° to 300°C.

Piezoelectric ignition of oven

burner. Total power 5 kW. Total

power 13.2 kW