modular

Client _____ Quantity _____

Project _____ Position _____

## ROC 700

**Model:** R70/40FTE/CR/T **Cod:** MP01374123010



### Technical data

| | |
|---|---|
| **Modularity:** | Top |
| **Dimensions (mm):** | 400x730x280 |
| **Total eletric power (kW):** | 5,4 |
| **Cooking zone dimensions 1 (LxD mm):** | 335x530 |
| **Electric power (V):** | 380-415 |
| **Ampere (A):** | 8,5 |
| **Phases:** | 3N |
| **Cable section (mmq):** | 5G1,5 |
| **Frequency (Hz):** | 50-60 |
| **Net volume (m3):** | 0,082 |
| **Packing dimensions (mm):** | 480x856x475 |
| **Gross weight (kg):** | 48,4 |
| **Gross volume (m3):** | 0,195 |

### Features

| | |
|---|---|
| **Working top:** | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
| **Material of plate:** | Polished chrome |
| **Plate finish:** | Ribbed |
| **Knobs:** | Made of aluminum with IPX5 water protection |
| **Flue:** | Removable gas exhaust flue grill made of cast iron |
| **Liquid collection container:** | Removable and dishwasher safe |
| **Plate:** | Polished chromed plate |
| **Upright Splash guard:** | On two sides (optional) |


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

# Electric griddle, ribbed polished chromed plate, top

Electric griddle with grooved chromed plate, counter top model. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10. Rear flue made in enamelled cast-iron. designed for flush alignment. Recessed (4 cm) hotplate fully welded and sealed to the top. Hard chrome plated hotplate with mirror polished surface with cold zone at the front. Round hole and extractable drawer for grease drain and collection. Plate dim.335x530 mm. Heating by means of Incoloy 800 armored heating elements. Temperature control by means of thermostat. Safety thermostat. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 5.4 kW.

## Technical draw

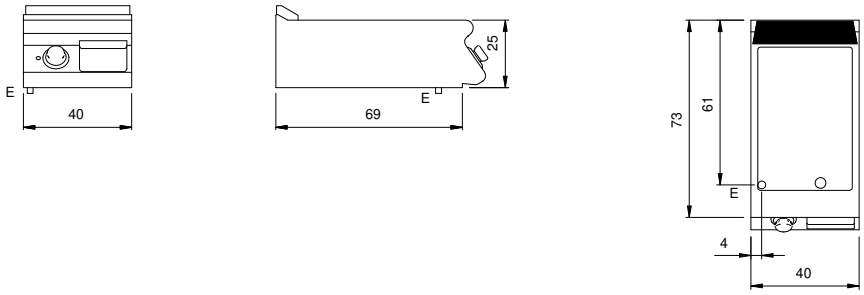


**E:** Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.