modular

Client _____ Quantity _____

Project _____ Position _____

# ROC 1100

**Model:** R110/60FTE/R/A **Cod:** MP01375125005

**Market:** Extra UE

## Technical data

| | |
|---|---|
| **Modularity:** | On open cabinet |
| **Dimensions (mm):** | 600x1100x870 |
| **Total eletric power (kW):** | 7,5 |
| **Cooking zone dimensions 1 (LxD mm):** | 335x900 |
| **Electric power (V):** | 380-415 |
| **Ampere (A):** | 11,5 |
| **Phases:** | 3N |
| **Cable section (mmq):** | 5G1,5 |
| **Frequency (Hz):** | 50-60 |
| **Net volume (m3):** | 0,574 |
| **Packing dimensions (mm):** | 880x1272x1274 |
| **Gross volume (m3):** | 1,426 |

## Features

| | |
|---|---|
| **Working top:** | Made of AISI 304 stainless steel with a thickness of 2 mm |
| **Material of plate:** | Mild steel |
| **Plate finish:** | Ribbed |
| **Knobs:** | Made of aluminum with IPX5 water protection |
| **Flue:** | Made of AISI 304 stainless steel |
| **Heating:** | Armoured heating elements |
| **Liquid collection container:** | Removable and dishwasher safe |
| **Plate:** | In mild steel |
| **Upright Splash guard:** | On two sides (optional) |


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

# Electric griddle, ribbed mild steel plate, on open cabinet

Electric griddle with ribbed plate, model on open cabinet. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10. Lateral flue made of stainless steel. Designed for flush alignment. Recessed (4 cm) hotplate fully welded and sealed to the top. Satin cold zone at the front of the hotplate. Round hole and extractable drawer for grease drain and collection. Heating by means of Incoloy 800 armored heating elements. Temperature control by means of thermostat. Safety thermostat. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel on both sides. Doors with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 7,5 kW.

## Technical draw

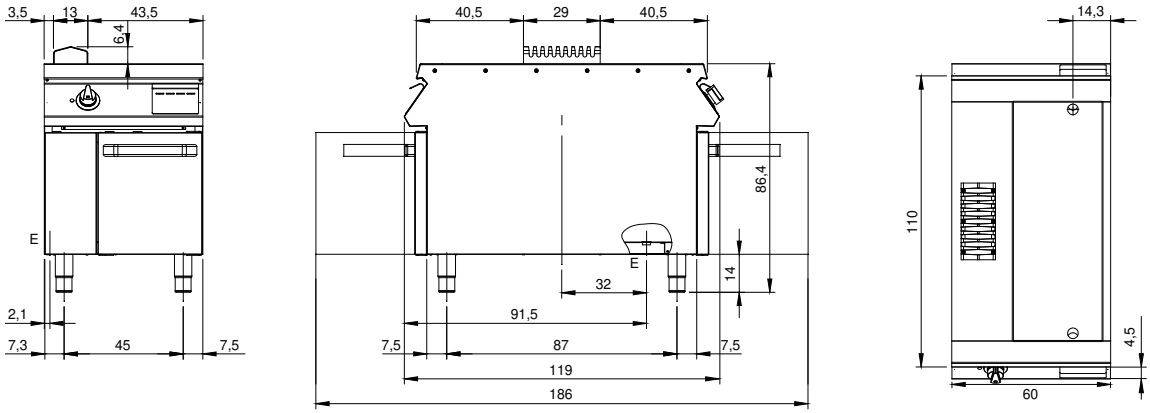


**E:** Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.