modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/80PGI/50 **Cod:** MP01534114004

Technical data

Modularity:	On closed cabinet
Dimensions (mm):	800x900x870
Total eletric power (kW):	0,3
Total gas power (Kcal/h):	9029
Total gas power (kW):	10,5
Nr. Wells:	1
Well litres 1:	50
Well dimensions 1 (mm):	Ø396x445
Gas connection:	1/2"
Electric power (V):	220-240
Ampere (A):	1,5
Phases:	1
Cable section (mmq):	3G1
Frequency (Hz):	50
Hot water inflow :	3/4"
Hot water temperature (°C):	40
Hot water pressure (bar):	Max pressure 5 bar
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1 1/2"
Net volume (m3):	0,626
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	170
Gross volume (m3):	1,426

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Type of heating:	Indirect
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	With solenoid valve
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Gas boiling pan indirect-heated, 50 liters

Gas boiling pan with indirect heating capacity 50 liters. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10. designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking weel walls in stainless steel AISI 304 and bottom in AISI 316. Balanced lid in stainless steel AISI 304 equipped with athermic handle. Structure made in stainless steel. Thermal insulation obtained by means of high thickness panels. Water charge by means of filling tap (hot and cold water) and swivel hose. Well drain hole with extractable filter. 2 front drain tap made in chromed brass with insulated handle. Jacket walls in AISI 304. Pressure control in the jacket by means of savety valve and analogical pressure gauge. Heating by means of high efficiency tubular burners in stainless steel. Cooking temperature controlled by safety tap equipped with termocouple and pilot burner. Ignition by piezoelectric device. Water lavel control in the jacket by level taps. Special design knob to avoid water penetration in the control panel. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 10,5 kW. Electric supply VAC 230 1N 50/60 Hz- 0.3 kW.

Technical draw

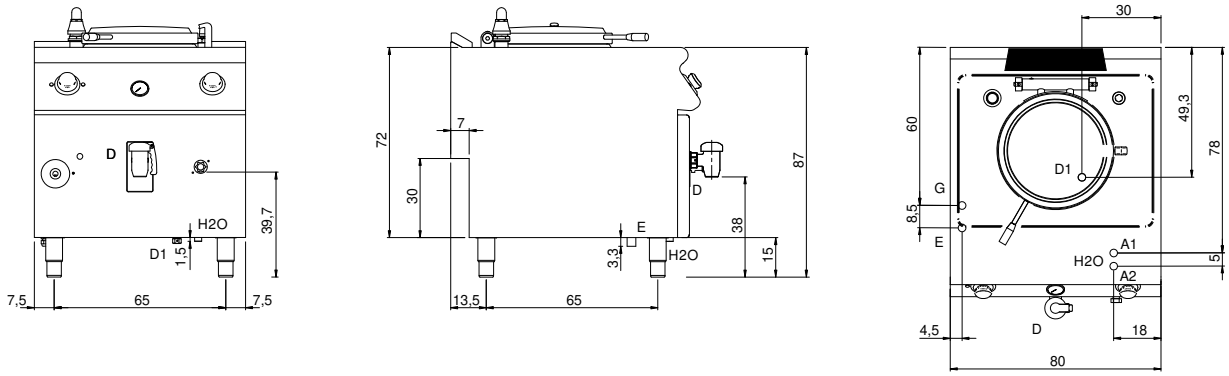

G:	Gas connection 1/2"	**E:**	Electric power	**H2O:**	Water inflow 3/4"
A1:	Hot water inflow	**A2:**	Cold water inflow	**D:**	Drain for water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.