



| Client | Quantity |
|---------|----------|
| Project | Position |

ROC 1100

Model: R110/40BMFE/P Cod: MP01575125002

Technical data

| Modularity: | On cabinet with doors |
|-------------------------------------|-----------------------|
| Dimension (mm): | 400x1100x870 |
| Total eletric power (kW): | 6,6 |
| Cooking zone dimensions 1 (LxD mm): | 320x750 |
| Nr. Wells: | 1 |
| Well litres 1: | 18 |
| Well dimensions 1 (mm): | 320x750x98 |
| Electric power (V): | 380-415 |
| Ampere (A): | 10,5 |
| Phases: | 3N |
| Cable section (mmq): | 5G1,5 |
| Frequency (Hz): | 50-60 |
| Net volume (m3): | 0,383 |
| Packing dimensions (mm): | 480x1272x1240 |
| Gross weight (kg): | 92 |
| Gross volume (m3): | 0,757 |


Features


| Working top: | Made of AISI 304 stainless steel with a thickness of 2 mm |
|-------------------------|--|
| Material of plate: | Chrome |
| Plate finish: | Smooth |
| Tipologia ribaltamento: | Manual input |
| Knobs: | Made of aluminum with IPX5 water protection |
| Handles: | The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines |
| Heating: | Armored heating elements positioned under the well |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Technical draw

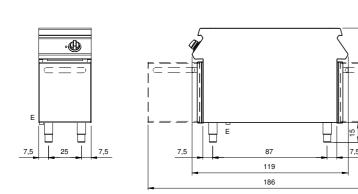



E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previouly or subsequently sold.