



Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## ROC 1100

Model: R110/40BMFE/P

Cod: MP01575125002

### Technical data


Modularity:	On cabinet with doors
Dimensions (mm):	400x1100x870
Total electric power (kW):	6,6
Cooking zone dimensions 1 (LxD mm):	320x750
Nr. Wells:	1
Well litres 1:	18
Well dimensions 1 (mm):	320x750x98
Electric power (V):	380-415
Ampere (A):	10,5
Phases:	3N
Cable section (mmq):	5G1,5
Frequency (Hz):	50-60
Net volume (m3):	0,383
Packing dimensions (mm):	480x1272x1240
Gross weight (kg):	92
Gross volume (m3):	0,757

### Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Material of plate:	Chrome
Plate finish:	Smooth
Tipologia ribaltamento:	Manual input
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Heating:	Armored heating elements positioned under the well

Electric multifunction brattpan capacity 13 liters, model on cabinet with door. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10. Designed for flush alignment. Rectangular cooking well Dim. 325x530 mm made of stainless steel AISI 304 and rounded edges. Heating by means of Incoloy 800 armored heating elements. Temperature control by means of thermostat. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel. Base completely made of stainless steel. Door with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50±60 Hz - 6,6 kW.

**Technical draw**

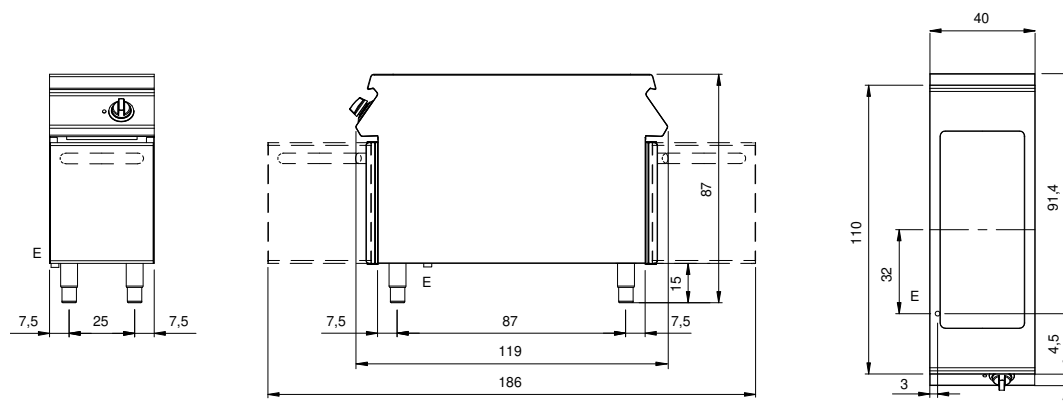

E: Electric power