modular



Client _____ Quantity _____

Project _____ Position _____

## FUN 700

**Model:** F70/40FTE/SR/P **Cod:** MP01372123033

### Technical data

| | |
|---|---|
| **Modularity:** | On cabinet with door |
| **Dimensions (mm):** | 400x700x850 |
| **Total eletric power (kW):** | 4,5 |
| **Cooking zone dimensions 1 (LxD mm):** | 396x520 |
| **Electric power (V):** | 380-415 |
| **Ampere (A):** | 7 |
| **Phases:** | 3N |
| **Cable section (mmq):** | 5G1,5 |
| **Frequency (Hz):** | 50-60 |
| **Net volume (m3):** | 0,238 |
| **Packing dimensions (mm):** | 477x776x1147 |
| **Gross weight (kg):** | 60 |
| **Gross volume (m3):** | 0,425 |

### Features

| | |
|---|---|
| **Working top:** | Made of AISI 304 stainless steel with a thickness of 10/10 mm |
| **Material of plate:** | Satin chrome |
| **Plate finish:** | Ribbed |
| **Knobs:** | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |
| **Handles:** | Brushed aluminum finish |
| **Plate:** | Satin chrome plate |


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

# Electric griddle, ribbed satin chrome plate, on cabinet with door

Electric griddle with satin chrome grooved plate on cabinet with door. Top made of AISI 304 stainless steel thickness 10/10; covering in AISI 304 stainless steel thickness 10/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel; flue cover in enamelled steel. satin chrome steel plate with high thermal conductivity for even temperature distribution. Equipped with front groove and pull-out drawer for collection of residual fats. Cooking zone equipped with 3 shielded heating elements which are thermostat controlled in a range of use from 50° to 300° C. Safety thermostat and indicator lights to show correct operation. - 3 plates x 1.5 kW - Total power 4.5 kW. Cooking plate dimensions 395x550 mm. Electrical power supply VAC 400 + 3N 50/60 Hz. Set up on cabinet with door.

## Technical draw

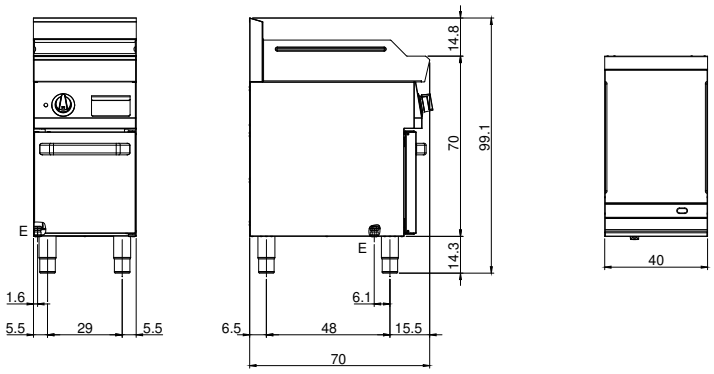


**E:** Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.