



Client _____ Quantity _____
 Project _____ Position _____

FUN 700

Model: F70/110CFGB

Cod: MP01032133001

Technical data


Modularity:	Gas oven
Dimensions (mm):	1100x700x850
Oven dimension (mm):	555x540x270
Total gas power (Kcal/h):	26484
Total gas power (kW):	30,8
Oven type:	Static oven
Oven power (kW):	5
Oven temperature range (°C):	150-300
Gas connection:	1/2"
Net volume (m3):	0,655
Packing dimensions (mm):	1176x776x1180
Gross weight (kg):	130
Burner power 1 (kW):	5,5
Burner power 2 (kW):	3,7
Burner power 3 (kW):	3,7
Burner power 4 (kW):	3,7
Burner power 5 (kW):	5,5
Burner power 6 (kW):	3,7
Gross volume (m3):	1,077

Features

Burners:	Double or single crown cast iron version available with a pilot light
Grill:	Cast-iron with brass single- and double-crown burner with pilot
Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm and removable enamelled containers
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Handles:	Brushed aluminum finish
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas range 4 burners with electric convection oven GN 1/1. Top made of AISI 304 stainless steel thickness 10/10; covering in AISI 304 stainless steel thickness 10/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Equipped with high-power cast iron/brass rapid burners with bowls in enamelled steel that can be extracted for easy cleaning. Gas supplied by means of safety valve cocks with thermocouple and pilot burner for automatic burner lighting. Pan supports for hobs in acid-resistant enamelled cast iron Oven in enamelled steel with double wall isolated door on hinges with balancing springs. The thermally insulated chamber is equipped with 3-position side rack supports which make it possible to insert 3 pans GN 1/1 h. 65 mm. Forced convection operation. Stainless steel fan rotor. 3 thermostat controlled heating elements with a field of temperature adjustment from 50° to 300°C. The oven is equipped with a main switch, thermostat and indicator lights to show correct operation. Internal dimensions 530x340x325h. mm. 1 rack GN 1/1 included. Upper level power (gas) 2 burners x 3.7 kW and 2 x 5.5 kW. Total gas power 18.4 kW Oven power (electric) 3.96 kW Electrical power supply VAC 400 + 3N 50÷60 Hz.

Technical draw

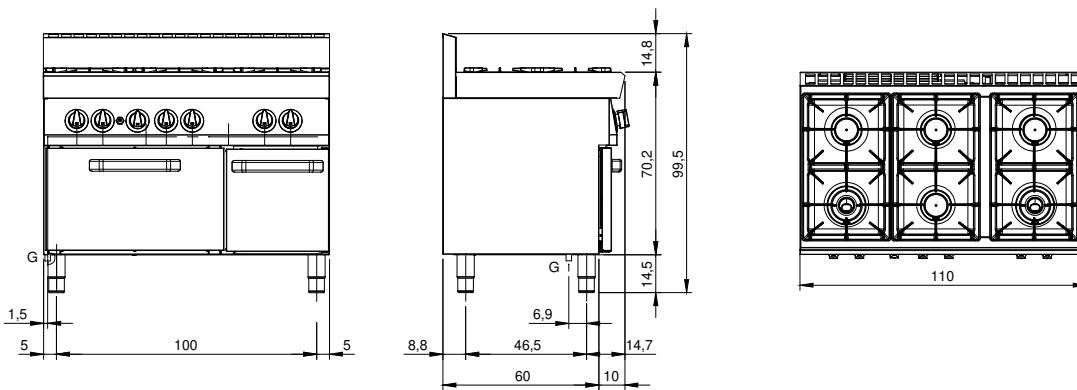

G: Gas connection 1/2"