

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## ROC 900

Model: R90/80TPE/T

Cod: MP01054124001



### Technical data


Modularity:	Top
Dimension (mm):	800x900x280
Total electric power (kW):	13,6
Electric power (V):	380-415
Ampere (A):	31
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,202
Packing dimensions (mm):	880x1026x509
Gross weight (kg):	125
Gross volume (m3):	0,460

### Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron

Electric solid top with 4 zones, counter top model. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking plate made with high thick steel 16M06. 4 independent cooking zones each with 3.4 kW power, marked with a satin cooking surface. Safety thermosat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 13,6 kW.

## Technical draw

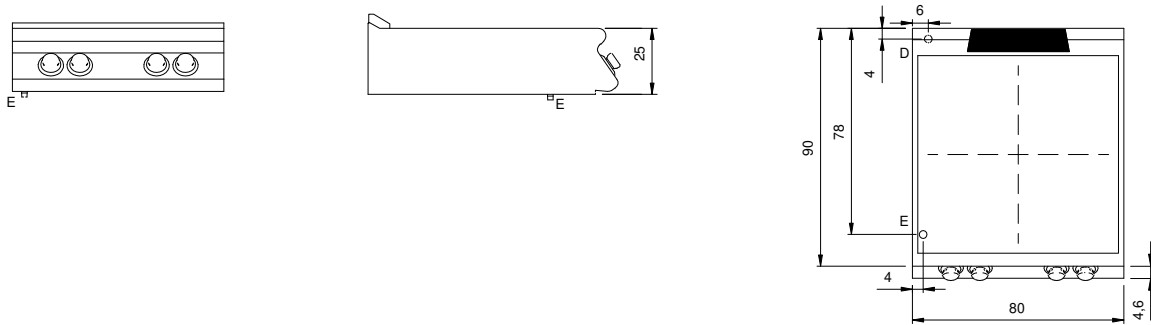

E: Electric power