

Client _____ Quantity _____

Project _____ Position _____

FUN 650

Model: F65/70PVE/T

Cod: MP01092122001



Technical data


Modularity:	Top
Dimension (mm):	700x650x300
Total electric power (kW):	9,2
Electric power (V):	380-415
Ampere (A):	21
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Net volume (m3):	0,137
Packing dimensions (mm):	776x776x636
Gross weight (kg):	38
Gross volume (m3):	0,383

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer

Electric hob in pyroceram, 4 zones Top made of AISI 304 stainless steel thickness 8/10; covering in AISI 430 stainless steel thickness 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Hermetic hob easily accessible for cleaning. The cooking zones are highly flexible. They reach operating temperature quickly and are equipped with a device against overheating. Six different temperature adjustments for each plate. Indicator lights to show electrical power supplied and cooking zones in operation. Power: 2 zones x 2.1 kW and 2 zones x 2.4 kW. Total power 9 kW. Electrical power supply V AC 400+3N 50÷60 Hz.

Technical draw

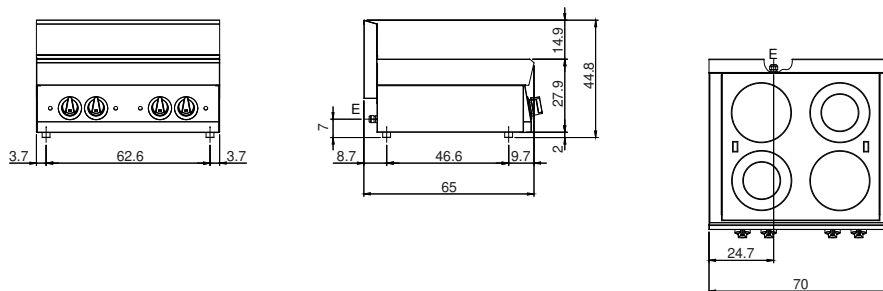

E: Electric power