modular



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/40PVE/P **Cod:** MP01094123003

Technical data

Modularity:	On cabinet with door
Dimensions (mm):	400x730x870
Total eletric power (kW):	5
Electric power (V):	380-415
Ampere (A):	11,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,254
Packing dimensions (mm):	480x856x1075
Gross weight (kg):	41,6
Gross volume (m3):	0,442

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Infrared surface 2 cooking zones,
on cabinet with door

Glass ceramic hob with 2 cooking zones, model on counter with door. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top with 2 indipendent cooking zone each equipped with a 2.5 kW radiating element diam.230 mm. and relevant energy regulator. Top designed for flush alignment. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation. Special design knobs to avoid water penetration in the control panel. IPX5 protection rating. Base completely made in stainless steel. Pressed hinged door. Ergonomic handle. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50/60 Hz - 5 kW.

Technical draw

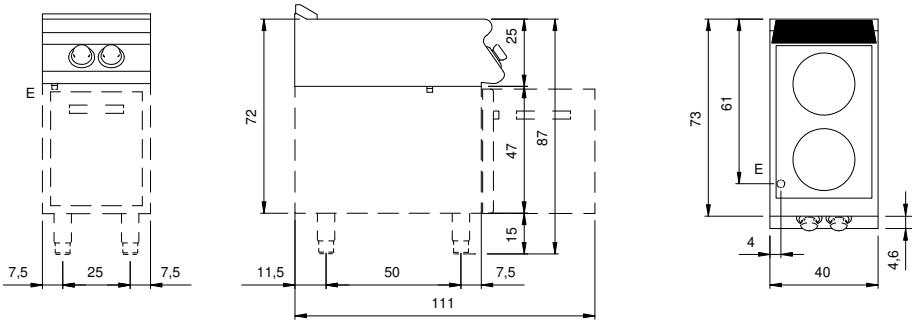

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.