modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/40PVE/A **Cod:** MP01094124002

Technical data

Modularity:	On open cabinet
Dimensions (mm):	400x900x870
Total eletric power (kW):	6,8
Electric power (V):	380-415
Ampere (A):	15,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,313
Packing dimensions (mm):	480x1026x1075
Gross weight (kg):	50,1
Gross volume (m3):	0,529

Features


Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Infrared surface 2 cooking zones,
on open cabinet

Glass ceramic hob 2 with cooking zone, model on open cabinet. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top with 2 indipendent cooking zone each equipped with a 3 kW radiating element diam.300 mm. and relevant energy regulator. Top designed for flush alignment. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation. Special design knobs to avoid water penetration in the control panel. IPX5 protection rating. Base completely made in stainless steel. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50/60 Hz - 6,8 kW.

Technical draw

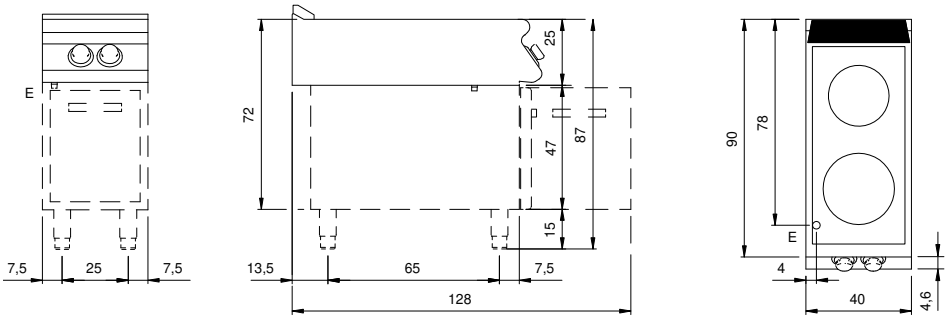

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.