modular

Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80IND/T **Cod:** MP01134123003



Technical data

Modularity:	Top
Dimensions (mm):	800x730x280
Total eletric power (kW):	14
Electric power (V):	380-415
Ampere (A):	21,5
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Net volume (m3):	0,164
Packing dimensions (mm):	880x856x509
Gross weight (kg):	78,6
Gross volume (m3):	0,383

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable gas exhaust flue grill made of cast iron


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Induction plate, 4 cooking zones, top

Induction hob with 4 cooking zones, counter top model. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top. Top designed for flush alignment. Heating is activated by the pots detection system when they are in contact with the plate equipped with 4 indipendent cooking zones each with 3.5 kW. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation designed for flush alignment. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 14 kW.

Technical draw

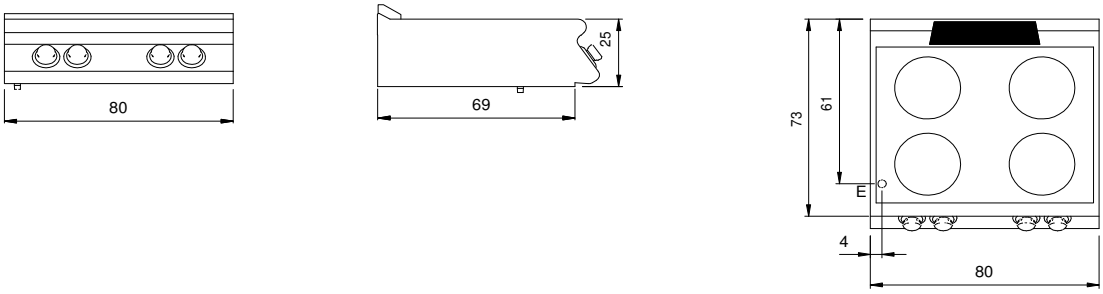

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.