modular



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80IND/P **Cod:** MP01134123005

Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	800x730x870
Total eletric power (kW):	14
Electric power (V):	380-415
Ampere (A):	21,5
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Net volume (m3):	0,508
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	102,3
Gross volume (m3):	0,835

Features


Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Induction plate, 4 cooking zones,
on cabinet with doors

Induction hob with 4 cooking zones, model on counter with doors. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top. Top designed for flush alignment. Heating is activated by the pots detection system when they are in contact with the plate equipped with 4 indipendent cooking zones each with 3.5 kW. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation designed for flush alignment. Special design knobs to avoid water penetration in the control panel.Base completely made in stainless steel. Presses hinged doors. Ergonomic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50/60 Hz - 14 kW.

Technical draw

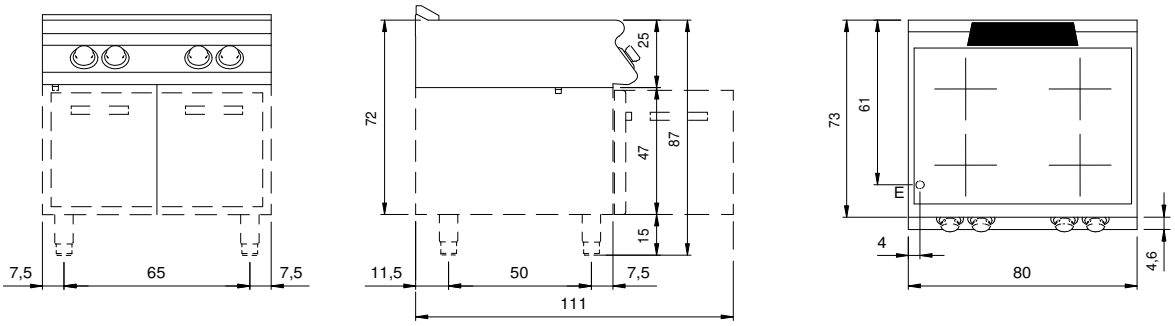

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.