

Client _____ Quantity _____
Project _____ Position _____

ROC 700

Model: R70/80BME/T

Cod: MP01254123003



Technical data


Modularity:	Top
Dimension (mm):	800x730x280
Total electric power (kW):	3
Nr. Wells:	1
Well litres 1:	39
Well dimensions 1 (mm):	730x516x155
Electric power (V):	380-415
Ampere (A):	5
Phases:	3N
Cable section (mmq):	5G1,5
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,164
Packing dimensions (mm):	880x856x509
Gross weight (kg):	60,6
Gross volume (m3):	0,383

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	Manual input

Electric bain-marie 2 GN 1/1, counter top model. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Well made in stainless steel AISI 304. Heating by means of armoured heating elements located under the well. Temperature control by means of thermostat with regulation from 30 °C to 90 °C. Safety thermostat with manual reset which stop heating in case of water lack in the well. Water drain by means of overflow system and vertical drain. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX5 protection rating. Electric power supply VAC 230 1N 50÷60 Hz - 3 kW.

Technical draw

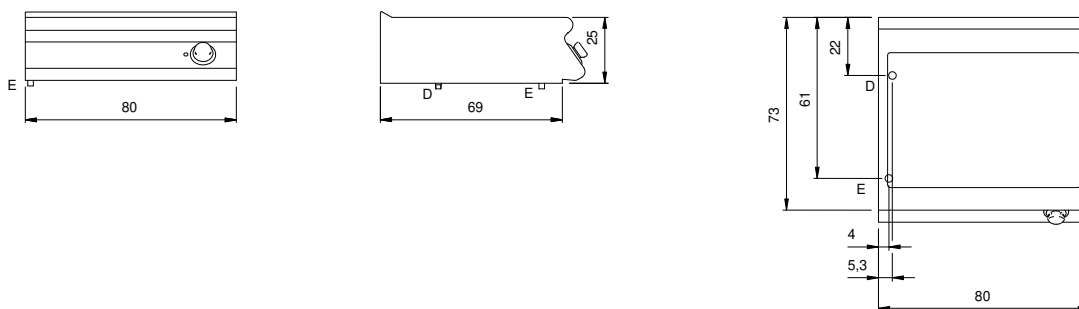

E: Electric power

D: Drain for water