modular



Client _____ Quantity _____

Project _____ Position _____

FUN 700

Model: F70/40FRESE/1V10/P **Cod:** MP01292123000

Technical data

Modularity:	On cabinet with door
Dimensions (mm):	400x700x850
Total eletric power (kW):	7,5
Nr. Wells:	1
Well litres 1:	10
Well dimensions 1 (mm):	244x364x207
Electric power (V):	380-415
Ampere (A):	11,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Net volume (m3):	0,238
Packing dimensions (mm):	477x776x1147
Gross weight (kg):	44
Gross volume (m3):	0,425

Features


Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Type of heating:	Direct
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Heating:	Tilting heating elements for efficient cleaning

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric fryer, ECO version, 1 well
10 liters

Electric fryer on base with door, eco version. 1 vat capacity 10 lt. Top and vat in AISI 304 stainless steel; covering in AISI 304 stainless steel thickness 10/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel; flue cover in enamelled steel. Drain valve located in the lower neutral compartment. Equipped with drip tray for collection of residual oil included. Shielded heating elements can be turned over for cleaning, thermostat-controlled in a range of use from 100° to 190°C. Main switch, safety thermostat and indicator light to show correct operation. Vat dimensions: 370x250x210h. mm. Tub capacity 10 lt. - 1 basket with handle in thermoplastic material, 1 vat cover and 1 vat filter included. Total power 7.5 kW. Electrical power supply VAC 400 + 3N 50/60 Hz.

Technical draw

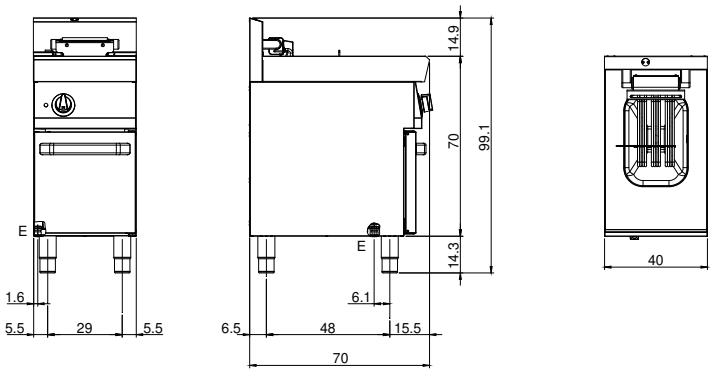

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.