modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/80FRGV/2V13/P **Cod:** MP01294114002

Technical data

Modularity:	On cabinet with doors
Dimensions (mm):	800x900x870
Total gas power (Kcal/h):	20637
Total gas power (kW):	24
Nr. Wells:	2
Well litres 1:	13
Well litres 2:	13
Well dimensions 1 (mm):	240x342x318
Well dimensions 2 (mm):	240x342x318
Gas connection:	1/2"
Net volume (m3):	0,626
Packing dimensions (mm):	880x1026x1274
Gross weight (kg):	131
Gross volume (m3):	1,150


Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Type of heating:	Direct
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron
Heating:	Heating pipes in the well
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Gas fryer with 1 wells 13+13 liters, model on counter with doors. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Rear flue made in enamelled cast-iron. Deep pressed wells with front expansion zone for oil collection and cold zone for food particles collection. Heating by means of high efficiency stainless steel burners located inside the well. Ignition by means of piezoelectric device. Safety thermostat with manual reset. Equipped with 1 basket 1/1 and 2 baskets 1/2 made of chrome plated steel and thermoplastic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 24 kW.

Technical draw

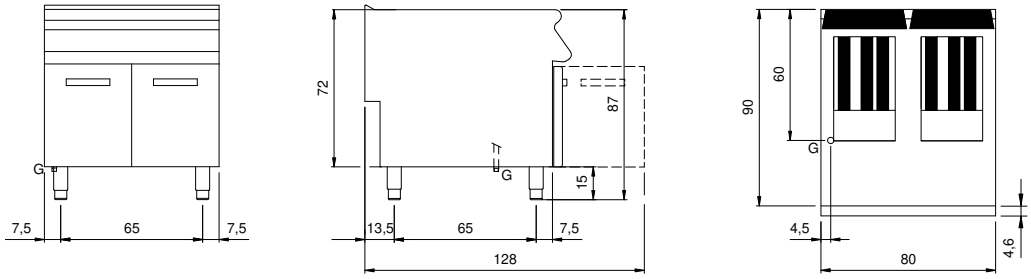

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.