



Client _____ Quantity _____

Project _____ Position _____

ROC 700

Model: R70/80PEI/50

Cod: MP01534123001


Technical data

Modularity:	On closed cabinet
Dimension (mm):	800x730x870
Total electric power (kW):	12,3
Nr. Wells:	1
Well litres 1:	50
Well dimensions 1 (mm):	Ø396x445
Electric power (V):	380-415
Ampere (A):	19,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Hot water inflow :	3/4"
Hot water temperature (°C):	40
Hot water pressure (bar):	Max pressure 5 bar
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1 1/2"
Net volume (m3):	0,508
Packing dimensions (mm):	880x1026x1109
Gross weight (kg):	110,5
Gross volume (m3):	1,001

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Type of heating:	Indirect
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	With solenoid valve

Technical draw

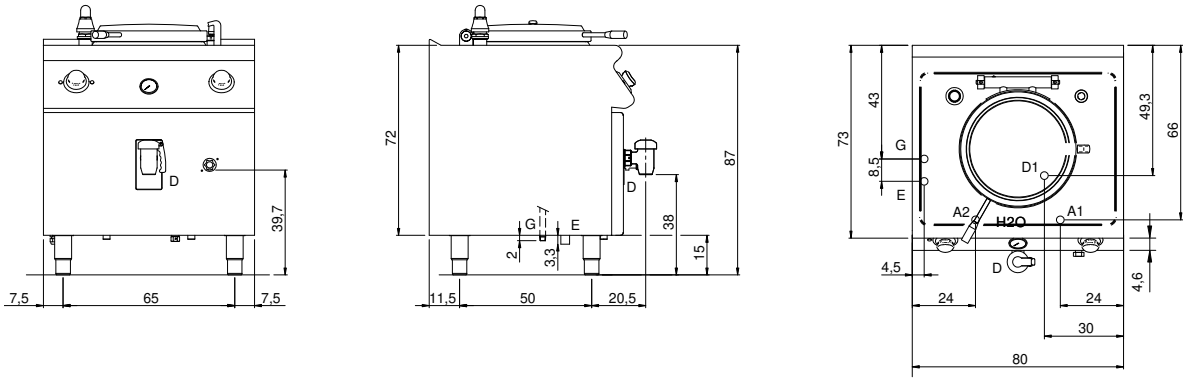

G: Gas connection 1/2"

E: Electric power

H2O: Water inflow 3/4"

A1: Hot water inflow

A2: Cold water inflow

D: Drain for water

D1: Cavity water discharge